


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF INTERCONNECT SYSTEMS INTERNATIONAL, LLC (ISI). IT SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF ISI.

DWG NO. 1 2220000434.PDF

REVISION HISTORY				
REV	DESCRIPTION	ECN	DATE	APR'D
1	INITIAL RELEASE	--	06/26/18	JAG

D
C
B
A

D
C
B
A

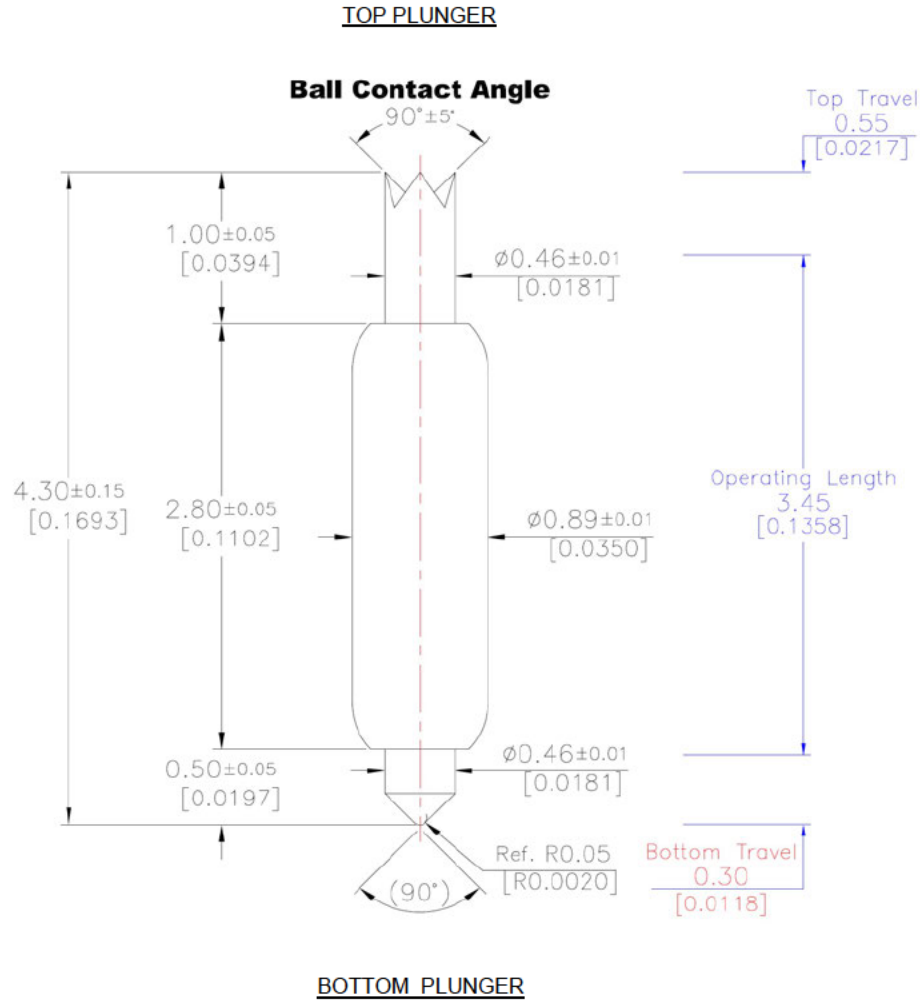

Pointing Accuracy: ± 0.07 mm
Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	5.0g (0.176oz)
Recommended Travel	0.85mm (0.0335")	28.0g (0.988oz)
Full Travel	0.95mm (0.0374")	30.0g (1.058oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Top Plunger	Hardened Beryllium Copper	Gold Plated
Bottom Plunger	Hardened Beryllium Copper	Gold Plated

NOTES:

- DUT board compliance of 0.30mm travel or greater required. Durability of the probe may be affected is less travel is used.
- Pointing accuracy needs to be considered in housing design. Failure to do so could result in a short problem or abnormal mechanical operation.
- It is important to verify the actual working travel of the probe in the socket design due to only 0.10mm variance between working and full travel. Failure to do so runs the risk of damaging the DUT, spring, plunger and/or pcb.

A

A

CONTRACT NO.				INTERCONNECT SYSTEMS INTL, LLC a mollex company	
DRAWN BY R.FLORES		DATE 06/26/18		741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012	
DESIGNER ET		DATE 06/26/18		TITLE POGO PIN	
CHECKER J.GELACIO		DATE 06/26/18		1.25mm Pitch, E/H Plungers, 28.0g SF, Au Plate Finish	
QA	DATE	SIZE	RoHS 6/6	SCALE	DRAWING NO.
--	--	A	N/A	N/A	2220000434
PROCESS ENG.	DATE	SAVED AS:	FINISHED ASSY:		REV
--	--	2220000434.PDF	--		1