

4

3

2

DWG NO. 1 2220000438.PDF

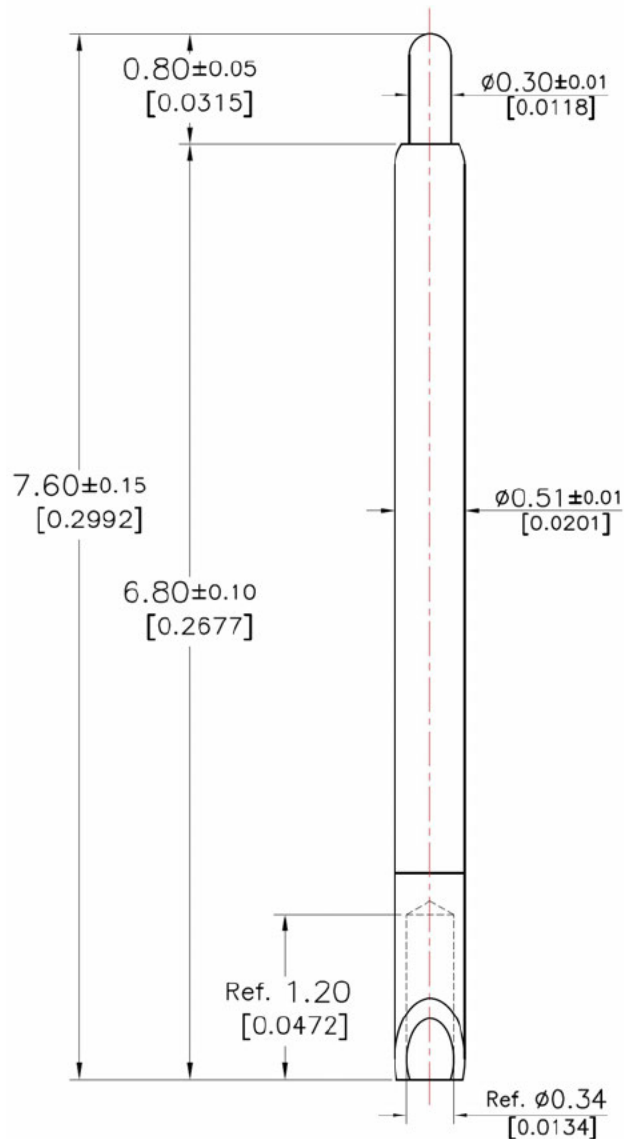
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF INTERCONNECT SYSTEMS INTERNATIONAL, LLC (ISI). IT SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF ISI.

REVISION HISTORY

REV	DESCRIPTION	ECN	DATE	APRV'D
1	INITIAL RELEASE	--	07/12/18	JAG

D

TOP PLUNGER

Pointing Accuracy: ± 0.05 mmSpring Force: $\pm 20\%$

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	13.5g (0.475oz)
Recommended Travel	0.40mm (0.0157")	26.0g (0.915oz)
Full Travel	0.60mm (0.0236")	31.8g (1.122oz)


PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Plunger [Top]	Hardened Beryllium Copper	Gold Plated
Terminal [Bottom]	Hardened Beryllium Copper	Gold Plated

NOTE:

- It is important to verify the working travel of the probe when designing the fixture or socket. The recommended working travel is 0.40mm and there is only a difference of 0.20mm to full compression. Full compression may cause the pin to fail and damage the device, spring, plungers and/or PCB pads.
- The diameter of assembly point of terminal & barrel could be max 0.01mm bigger than that of barrel's max tolerance.

B

A

CONTRACT NO.				INTERCONNECT SYSTEMS INTL, LLC a mollex company	
DRAWN BY R.FLORES		DATE 07/12/18		741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012	
DESIGNER ET		DATE 07/12/18		TITLE POGO PIN	
CHECKER J.GELACIO		DATE 07/12/18		0.75mm PITCH, C PLGR, W/ SOLDER POT, 26.0g SF	
QA	DATE	SIZE	RoHS 6/6	SCALE	DRAWING NO.
--	--	A	N/A		2220000438
PROCESS ENG.	DATE	SAVED AS:	FINISHED ASSY:		REV
--	--	2220000438.PDF	--		1

4

3

2

1

SHEET 1 OF 1