

4

3

2

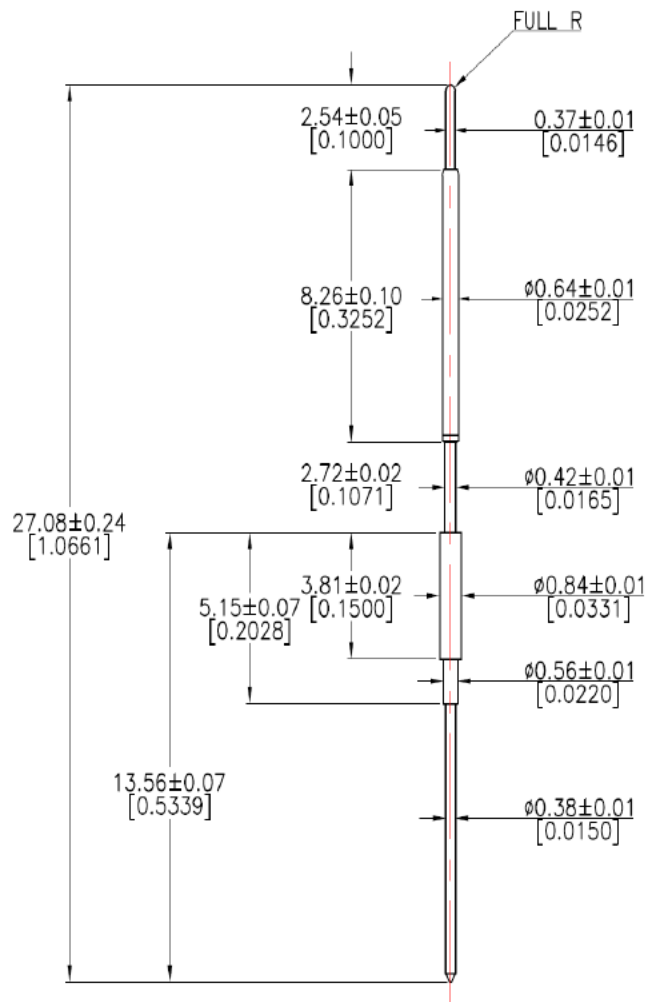
DWG No. 1 2220000465.PDF

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF INTERCONNECT SYSTEMS INTERNATIONAL, LLC (ISI). IT SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF ISI.

## REVISION HISTORY

REV	DESCRIPTION	ECN	DATE	APRVD
1	INITIAL RELEASE	--	11/5/18	JAG

## TOP PLUNGER

Pointing Accuracy:  $\pm 0.05$  mmSpring Force:  $\pm 20\%$ 

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	20.6g (0.726oz)
Recommended Travel	1.08mm (0.0425")	48.0g (1.692oz)
Full Travel	2.41mm (0.0949")	81.7g (2.882oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Top Plunger	Hardened Beryllium Copper	Gold Plated
Bottom Terminal	Hardened Beryllium Copper	Gold Plated

## BOTTOM TERMINAL

DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

DECIMALS: .XX ±0.100 X.XX ±0.050 X.XXX ±0.025

ANGULAR: X.0° ±1.0° X.XX° ±0.5°

CONTRACT NO.

SO29111



INTERCONNECT SYSTEMS INTL, LLC  
a mollex company

741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012

DRAWN BY M.Nunes DATE 11/5/18

DESIGNER ET DATE 11/5/18

CHECKER R.Flores DATE 11/5/18

QA N/A DATE

PROCESS ENG. N/A DATE

TITLE

POGO PIN  
1.00mm Pitch, D/E, 48.0g SF, Au Plate Finish

SIZE A

RoHS

SCALE N/A

DRAWING NO.

2220000465

REV 1

SAVED AS:

2220000465.PDF

FINISHED ASSY:

SHEET 1 OF 1

4

3

2

1