

These drawings and specifications are the property of Interconnect Systems, Inc., and shall not be reproduced, or copied, or used without prior written permission.


DWG NO. 1 POGO-PIN-24.7-1

REVISION HISTORY

REV	DESCRIPTION	ECN	DATE	APRV'D
1	INITIAL RELEASE	--	06/05/17	JAG

D
C
B
A

DEVICE SIDE

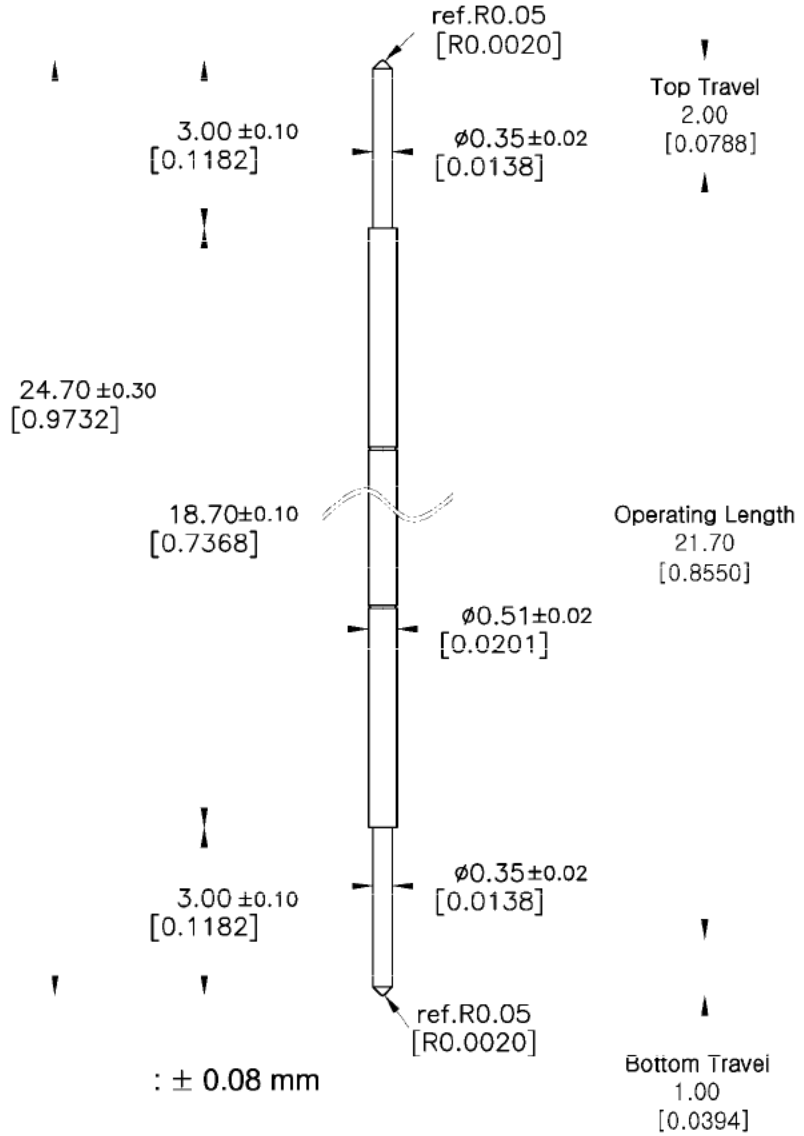

Pointing Accuracy: ± 0.08 mm
Spring Force: ± 30%


STATE	TRAVEL	SPRING FORCE
Initial Travel	--	7.0g (0.247oz)
Recommended Travel	3.00mm (0.1181")	30.0g (1.060oz)
Full Travel	4.00mm (0.1575")	37.7g (1.331oz)

PART	MATERIAL	FINISH
Plunger [Device]	Hardened Beryllium Copper	Gold Plated
Plunger [Board]	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Stainless Steel	Gold Plated

A

BOARD SIDE

DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
DECIMALS: .XX ±0.100 .XXX ±0.050 .XXXX ±0.025
ANGULAR: X.X° ±1.0° X.XX° ±0.5°

CONTRACT NO. SO 26481				INTERCONNECT SYSTEMS INC. a molex company 741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012	
DRAWN BY J. GELACIO	DATE 06/05/17	TITLE POGO PIN 0.65mm Pitch, E/E Plungers, 30.0g SF, Au Plate Finish			
DESIGNER ET	DATE 06/05/17	SIZE A	RoHS	SCALE N/A	DRAWING NO. POGO-PIN-24.7-1
CHECKER M. NUNES	DATE 06/05/17	SAVED AS: POGO-PIN-24.7-1.DOC	FINISHED ASSY: -	REV 1	SHEET 1 OF 1
QA N/A	DATE	PROCESS ENG. N/A	DATE		

4 3 2 1