


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF INTERCONNECT SYSTEMS INTL, LLC. IT SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED TO THIRD PARTIES WITHOUT PRIOR WRITTEN CONSENT OF INTERCONNECT SYSTEMS INTL.

REVISION HISTORY				
REV	DESCRIPTION	ECN	DATE	APRVD
1	INITIAL RELEASE	--	08/09/19	ET

D
C
B
A

D
C
B
A

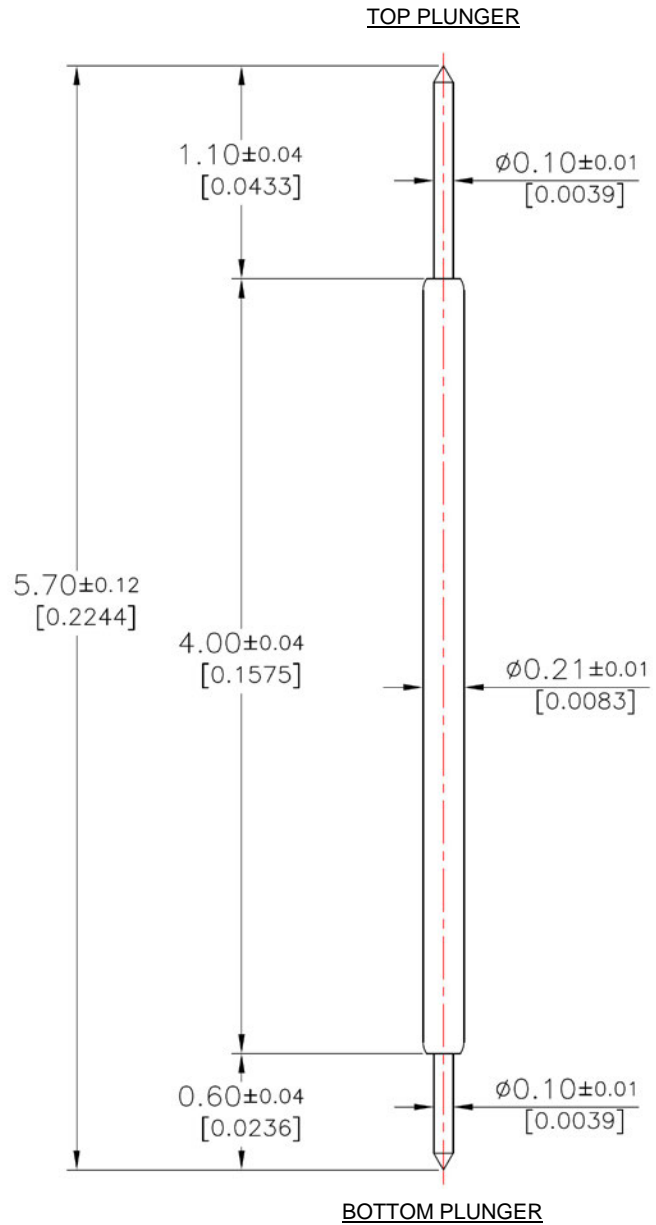

Pointing Accuracy: ± 0.04 mm

Spring Force: ± 30%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	3.2g (0.113oz)
Recommended Travel	0.65mm (0.0256")	10.8g (0.381oz)
Full Travel	1.00mm (0.0394")	14.9g (0.525oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated Only
Barrel	Nickel Gold Alloy	Gold Plated over Nickel
Top Plunger	Hardened Beryllium Copper	Gold Plated Only
Bottom Plunger	Hardened Beryllium Copper	Gold Plated Only

CONTRACT NO. RF06171902			INTERCONNECT SYSTEMS INTL, LLC a molex company		
CAGE CODE 3F8U4			741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012 805-482-2870 MAIN 805-482-8470 FAX		
PREPARED BY R.FLORES	DATE 06/24/19	TITLE POGO PIN			
DESIGNER ET	DATE 06/24/19	0.30mm Pitch, E/E Plungers, 10.8g SF, Au Plate Finish			
CHECKER ET	DATE 06/24/19	SIZE A	ROHS 6/6	SCALE N/A	DRAWING NO. POGO-PIN-5.70-H
QA --	DATE --	SAVED AS: POGO-PIN-5.70-H.PDF		FINISHED ASSY: --	MOLEX PART NUMBER 2220000698
PROCESS ENG. --	DATE --	SHEET 1 OF 1			REV 1

DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
 DECIMALS: X.X ±0.100 X.XX ±0.050 X.XXX ±0.025
 ANGULAR: X.X° ±1.0° X.XX° ±0.5°