


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	03/14/2016	RF

[Device Side]

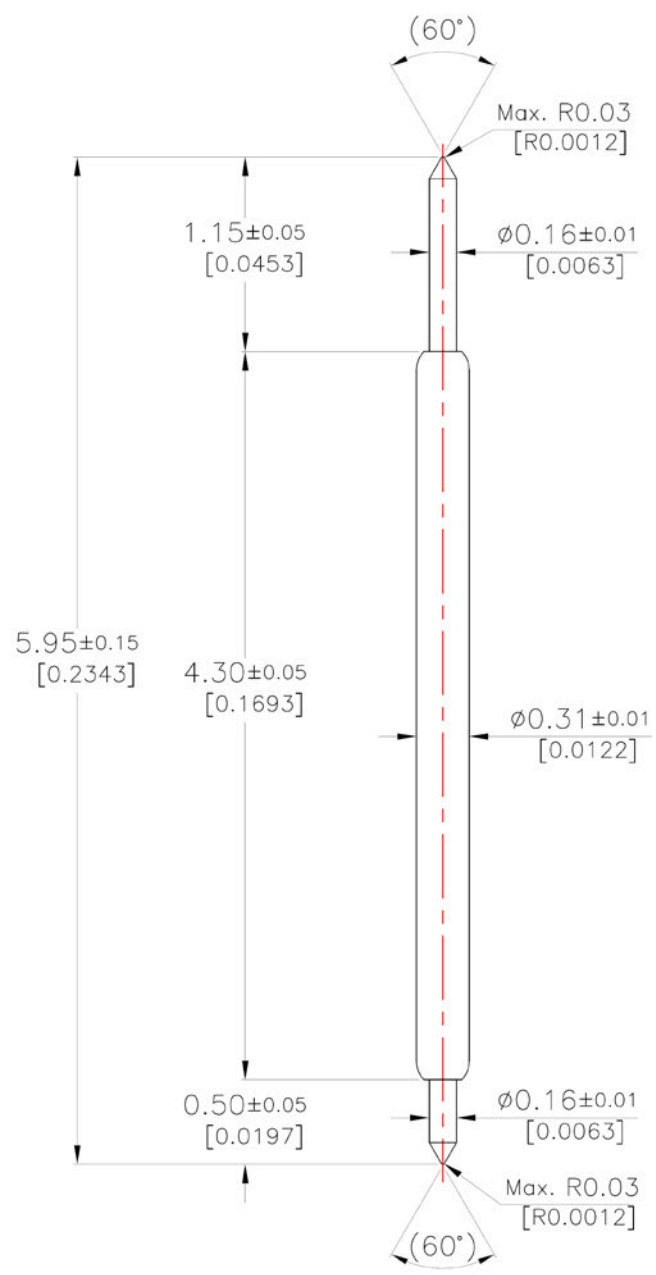

Pointing Accuracy: ± 0.05 mm

Spring Force: ± 3g

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	3.7g (0.130oz)
Recommended Travel	0.60mm (0.0236")	13.0g (0.458oz)
Full Travel	0.90mm (0.0354")	17.6g (0.619oz)

PART	MATERIAL	FINISH
Spring	Hardened Beryllium Copper	Au Plated Only
Barrel	Brass	Au Plated Only
Top Plunger	Hardened Beryllium Copper	Au Plated Only
Bottom Plunger	Hardened Beryllium Copper	Au Plated Only

Non-Magnetic

[Board Side]

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



EMULATION TECHNOLOGY, INC.

VLSI and SMT ADAPTERS and ACCESSORIES

741 FLYNN ROAD
CAMARILLO, CA 93012

TEL: (805) 383-8480
FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 03/14/16	REVISION: A	ASSEMBLY DRAWING
------------------	-------------------	----------------	-------------------------

CHECKED: ET	PREPARED BY: R. FLORES	ITEM: POGO-PIN-5.95-7
----------------	---------------------------	--------------------------

DO NOT SCALE DRAWING	DESCRIPTION: POGO-PIN-5.95-7
----------------------	---------------------------------