

4

3

2

DWG NO. 1 POGO-PIN-8.00-5


These drawings and specifications are the property of Interconnect Systems, LLC, and shall not be reproduced, or copied, or used without prior written permission.

REVISION HISTORY

REV	DESCRIPTION	ECN	DATE	APRVD
1	INITIAL RELEASE	--	4/11/18	RF

D

TOP SIDE

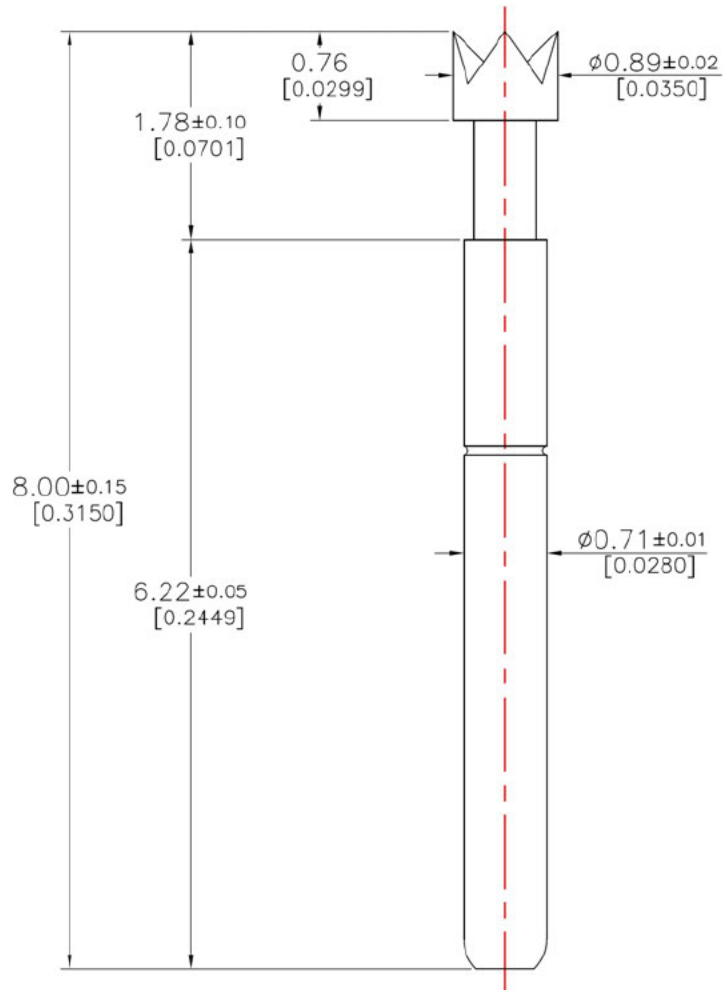

Pointing Accuracy: ± 0.05 mm

Spring Force: $\pm 20\%$


STATE	TRAVEL	SPRING FORCE
Initial Travel	--	16.2g (0.571oz)
Recommended Travel	1.02mm (0.0402")	57.0g (2.009oz)
Full Travel	1.02mm (0.0402")	57.0g (2.009oz)

PART	MATERIAL	FINISH
Plunger [Top Side]	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Stainless Steel	Gold Plated

B

A

BOTTOM SIDE

CONTRACT NO. Proj # 0662				INTERCONNECT SYSTEMS INC. a molex company 741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012	
DRAWN BY R. FLORES	DATE 3/8/18	TITLE POGO PIN 1.27mm Pitch, H Plunger, 57.0g SF, Au Plate Finish			
DESIGNER R. FLORES	DATE 3/8/18				
CHECKER N. NUNES	DATE 4/11/18				
QA N/A	DATE	SIZE A	RoHS	SCALE N/A	DRAWING NO. POGO-PIN-8.00-5
PROCESS ENG. N/A	DATE	SAVED AS: POGO-PIN-8.00-5.DOC	FINISHED ASSY: -	REV 1	SHEET 1 OF 1

4

3

2

1