


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/13/03	S.C.
B	UPDATED NOTED	10/12/05	H.N.
C	UPDATED DRAWING	01/25/10	JAG

SKT1769

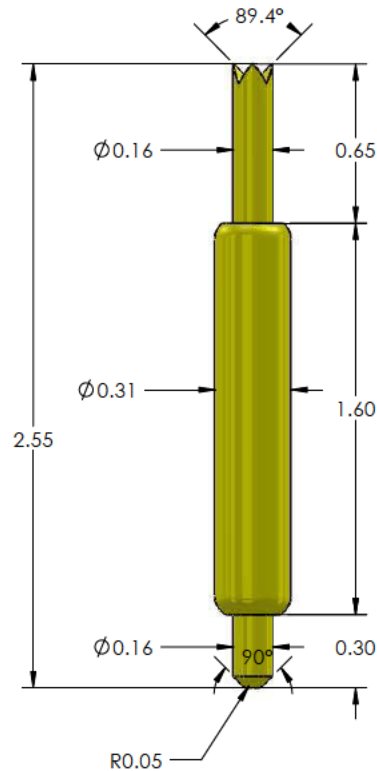

**Spring force**  
 3.8 g at initial travel  
 18.0g at 0.45mm recommended travel  
 22.0g at 0.6mm full travel

**Material & Finish**  
 Plunger [Top]: Hardened Beryllium copper / Gold Plated  
 Plunger [Bottom] :Hardened Beryllium copper / Gold Plated  
 Barrel: Phosphor Bronze / Gold Plated  
 Spring: Stainless Steel / Gold Plated



**Emulation Technology, Inc.**

VLSI and SMT ADAPTERS and ACCESSORIES

759 Flynn Road  
 Camarillo, Ca 93012

TEL:(805)383-8480  
 FAX:(805)383-8484

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE:  
 IN INCHES (MILLIMETERS)  
 TOLERANCES ARE:  
 X ± 0.100MM ANKLES:  
 XX ± 0.050MM XX' ± 10°  
 XXX ± 0.025MM XXX' ± 0.5°

SHEET: 1 OF 1	DATE: 10/12/05	REVISION: C	ASSEMBLY DRAWING
CHECKED: PERRY MUNROE	DRAWN: HUY NGUYEN	ITEM: POGO-PIN-2.55-1	DESCRIPTION: POGO-PIN-2.55-1
Scale N/A DO NOT SCALE DRAWING			