


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	11/16/06	H.N.
B	ADDED TOLERANCES	12/05/06	H.N.

SKT2802

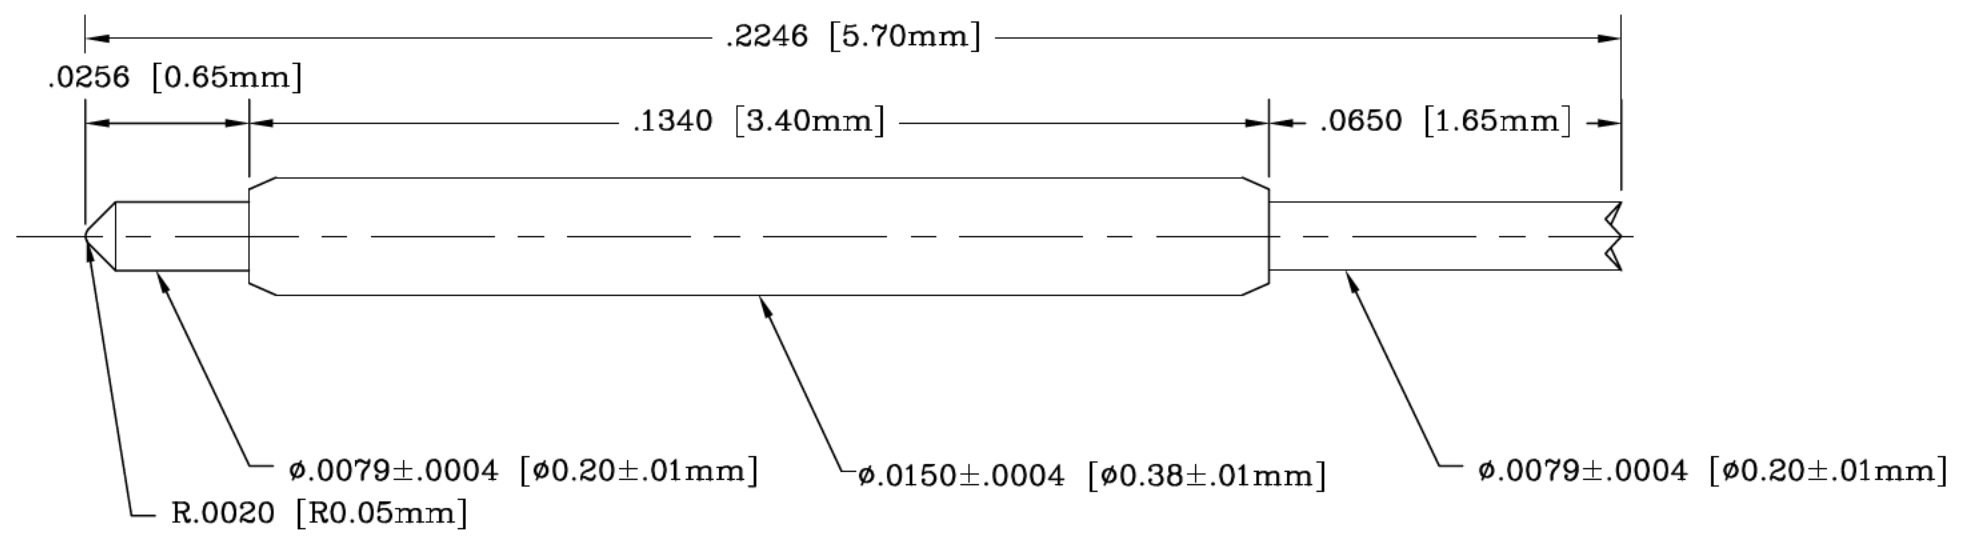

POINTING ACCURACY: $\pm 0.085\text{mm}$
 SPRING FORCE: $\pm 20\%$
 3.6g(0.127oz) AT INITIAL TRAVEL,
 8.5g(0.300oz) AT .0295 [0.75mm] RECOMMENDED TRAVEL
 8.9g(0.314oz) AT .0315 [0.80mm] FULL TRAVEL

MATERIAL & FINISH:
 PLUNGER HARDENED BERYLLIUM COPPER / GOLD PLATED
 BARREL PHOSPHOR BRONZE / GOLD PLATED
 SPRING MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

Emulation Technology, Inc.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051
 TEL:(408)982-0660 FAX:(408)982-0664

SHEET: 1 OF 1	DATE: 11/16/06	REVISION: B	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: POGO-PIN-5.70-8	
Scale N/A	DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-5.70-8