


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	05/22/07	H.N.

SKT2930

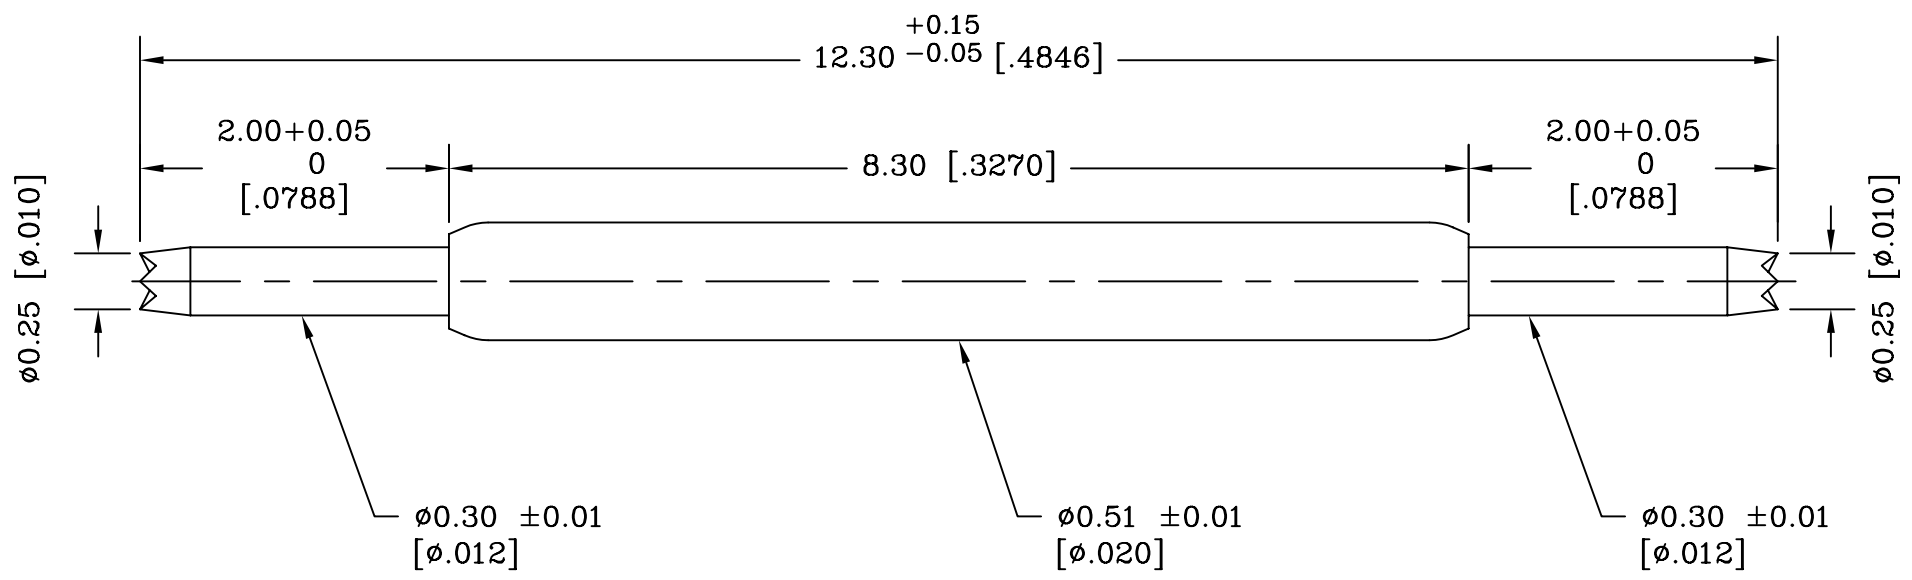


POINTING ACCURACY: ±0.05mm

SPRING FORCE [±20%]

7.2g(0.254oz) AT INITIAL TRAVEL
 37.2g(1.312oz) AT 2.74mm(0.1079) RECOMMENDED TRAVEL
 38.9g(1.372oz) AT 2.90mm(0.1142) FULL TRAVEL

MATERIAL & FINISH:

PLUNGER	HARDENED BERYLLIUM COPPER	/ GOLD PLATED
BARREL	PHOSPHOR BRONZE	/ GOLD PLATED
SPRING	MUSIC WIRE	/ GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETER [INCH] UNLESS OTHERWISE SPECIFIED			
		Emulation Technology, Inc. — VLSI and SMT ADAPTERS and ACCESSORIES —	
		2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051	TEL:(408)982-0660 FAX:(408)982-0664
SHEET: 1 OF 1	DATE: 05/22/07	REVISION: A	ASSEMBLY DRAWING
CHECKED:		DRAWN: H.N.	ITEM: POGO-PIN-12.3-1
Scale N/A		DO NOT SCALE DRAWING	
			DESCRIPTION: POGO-PIN-12.3-1