


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/05/10	JAG
B	BOTTOM OF PIN CHANGED	01/25/10	JAG

SKT3382

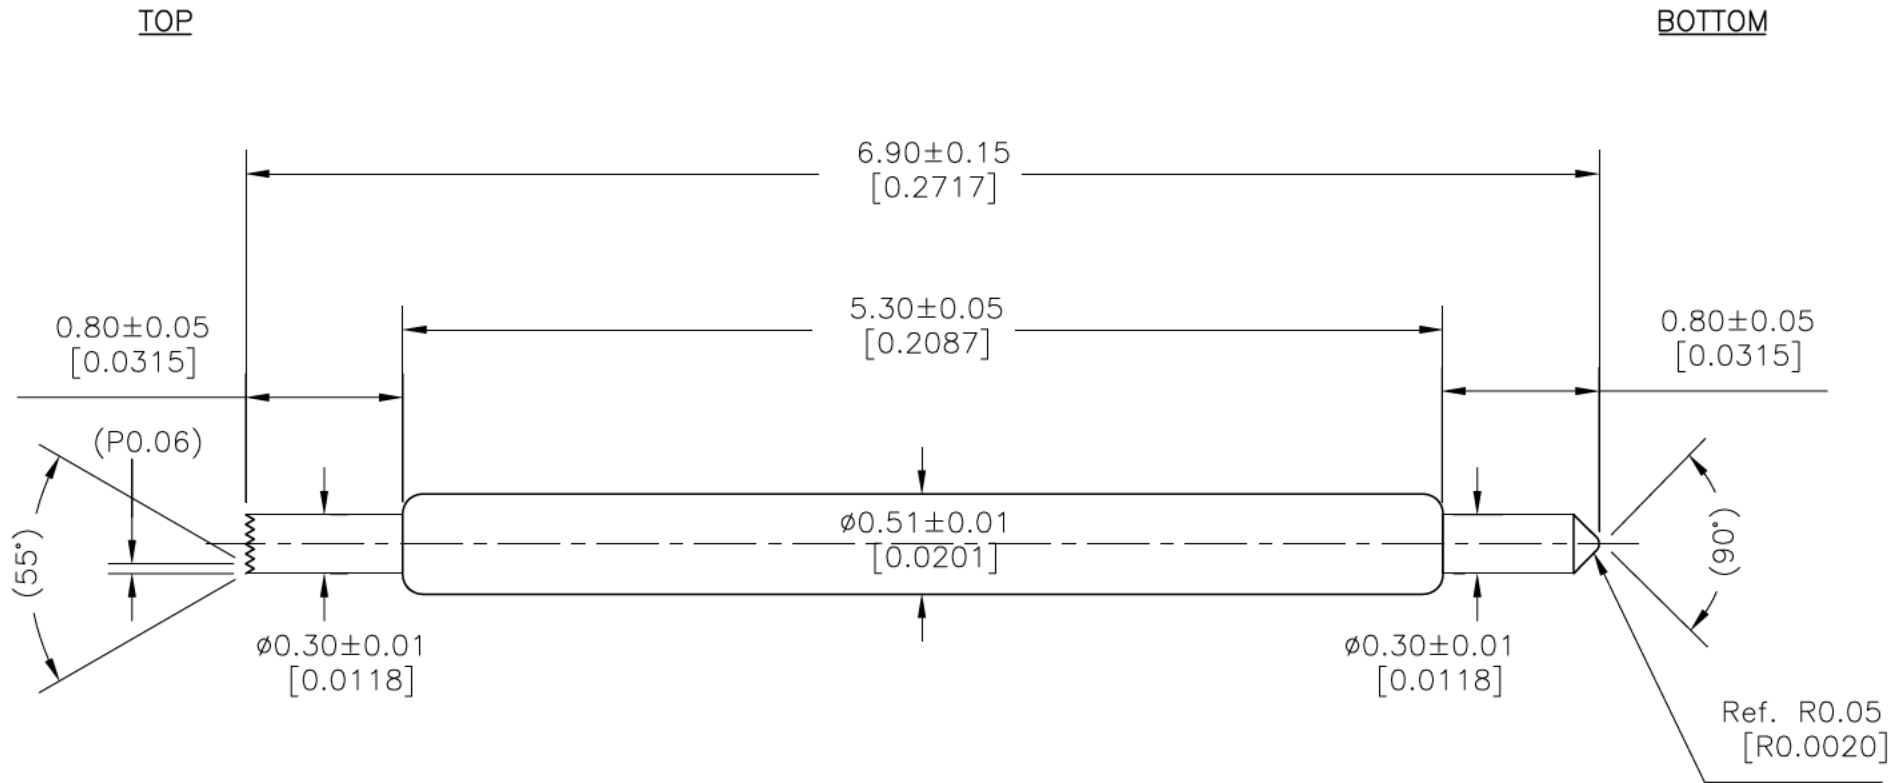

POINTING ACCURACY: $\pm 0.05\text{mm}$

SPRING FORCE: [$\pm 20\%$]

6.0g (0.212oz) AT INITIAL TRAVEL

24.6g (0.868oz) AT 1.10mm (0.0433) RECOMMENDED TRAVEL

33.1g (1.168oz) AT 1.60mm (0.0630) FULL TRAVEL

MATERIAL & FINISH

PLUNGER (TOP) HARDENED BERYLLIUM COPPER / GOLD PLATED
 PLUNGER (BOT) HARDENED BERYLLIUM COPPER / GOLD PLATED
 BARREL PHOSPHOR BRONZE / GOLD PLATED
 SPRING MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



EMULATION TECHNOLOGY, INC.

— VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 01/05/10	REVISION: B	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-6.90-2	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-6.90-2