


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/19/10	JAG

SKT3403

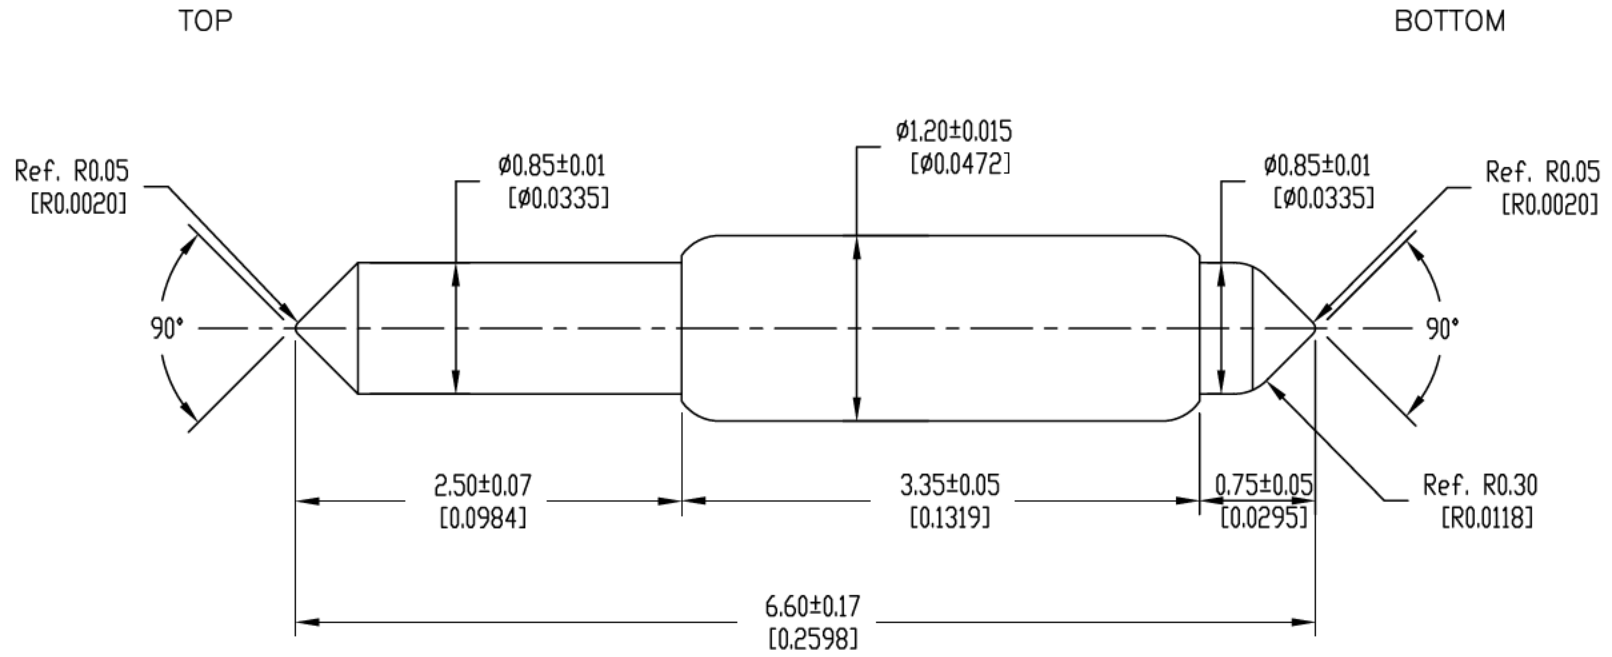

POINTING ACCURACY:  $\pm 0.09\text{mm}$

SPRING FORCE [ $\pm 20\%$ ]

- 6.9g(0.243oz) AT INITIAL TRAVEL
- 26.1g(0.921oz) AT 1.00mm(0.0394) RECOMMENDED TRAVEL
- 30.8g(1.086oz) AT 1.25mm(0.0492) FULL TRAVEL

MATERIAL & FINISH

- TOP PLUNGER: HARDENED BERYLLIUM COPPER / GOLD PLATED
- BOTTOM PLUNGER: HARDENED BERYLLIUM COPPER / GOLD PLATED
- BARREL: BRASS / GOLD PLATED
- SPRING: MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



**EMULATION TECHNOLOGY, INC.**

— VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD  
CAMARILLO, CA 93012

TEL: (805) 383-8480  
FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/19/10	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-6.60-1	
DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-6.60-1	