


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/10/10	JAG

SKT3565

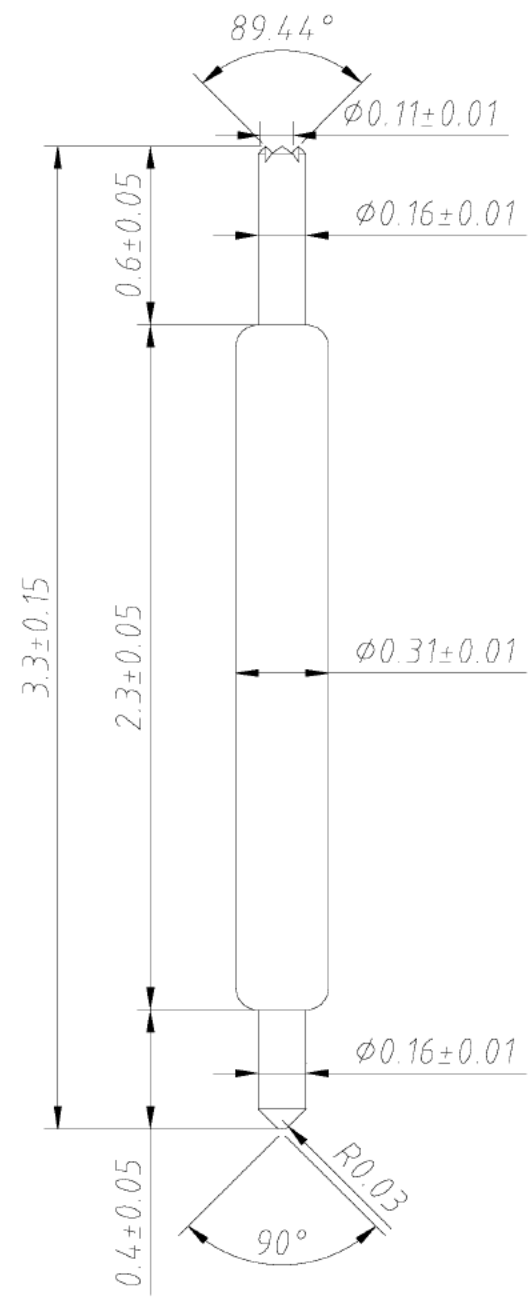


STATE	TRAVEL (mm)	SPRING FORCE (g)
INITIAL TRAVEL	--	4.9
RECOMMENDED TRAVEL	0.50	31.0
FULL TRAVEL	0.70	39.4

POINTING ACCURACY ± 0.05 mm		
PART	MATERIAL	FINISH
SPRING	MUSIC WIRE	GOLD PLATED
BARREL	PHOSPHOR BRONZE	GOLD PLATED
TOP PLUNGER	HARDENED STEEL	GOLD PLATED
BOTTOM PLUNGER	HARDENED BERYLLIUM COPPER	GOLD PLATED

DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE:  
 X.X ±0.100MM ANGULAR: X.X° ±1.0°  
 X.XX ±0.050MM X.XX° ±0.5°  
 X.XXX ±0.025MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	<b>EMULATION TECHNOLOGY, INC.</b> — VLSI and SMT ADAPTERS and ACCESSORIES —	
	759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 12/10/10	REVISION: A
CHECKED:		PREPARED BY: J. GELACIO
DO NOT SCALE DRAWING		ITEM: POGO-PIN-3.33-3 DESCRIPTION: POGO-PIN-3.33-3