


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/14/10	JAG

SKT3567

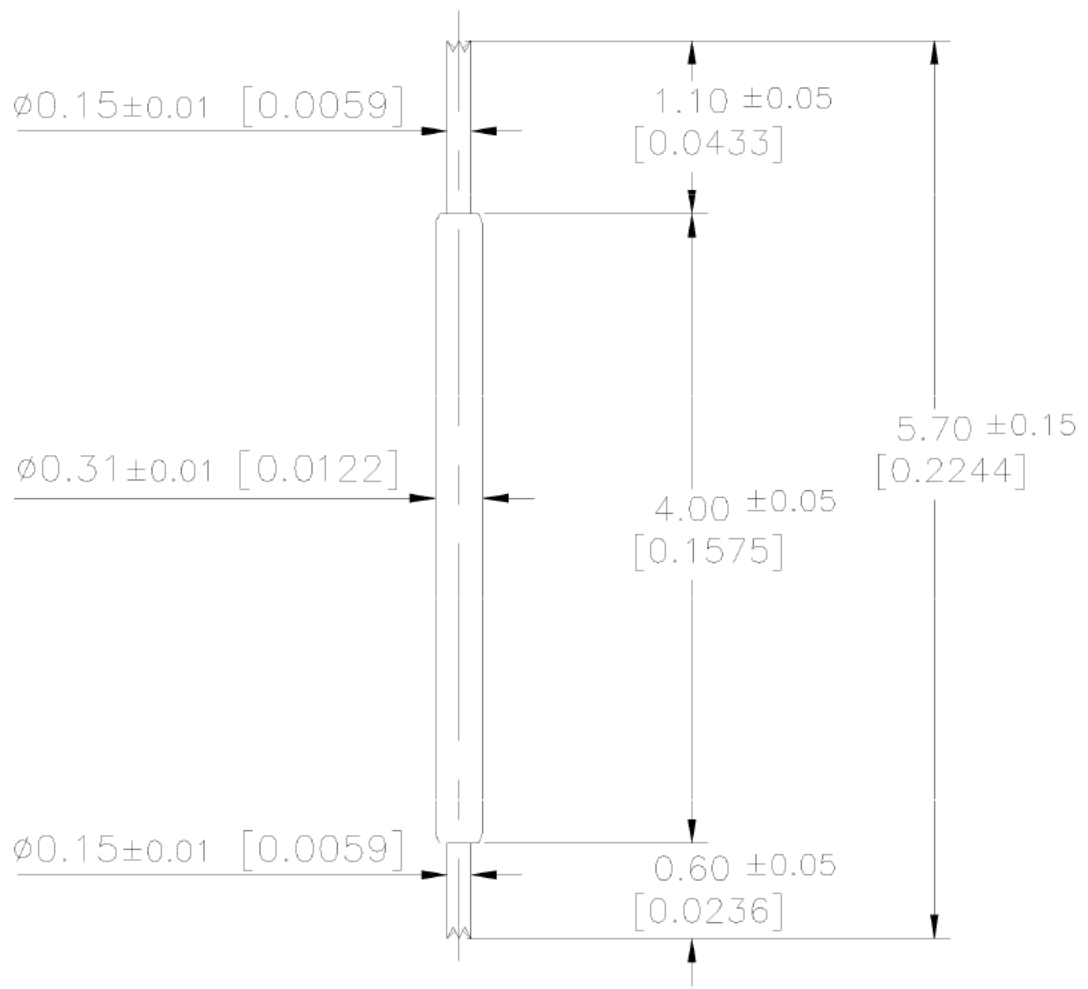

Pointing Accuracy:  $\pm 0.03$  mm

Spring Force

- 11.3g (0.399oz) at initial travel
- 20.3g (0.716oz) at 0.50mm (0.0197) recommended travel
- 25.7g (0.907oz) at .80mm (0.0315) full travel

Material & Finish

Plunger	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED  
 SPECIFIED TOLERANCES ARE:  
 X.X  $\pm 0.100$ MM ANGULAR:  
 X.XX  $\pm 0.050$ MM X.X°  $\pm 1.0$ °  
 X.XXX  $\pm 0.025$ MM X.XX°  $\pm 0.5$ °

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**ET** **EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —  
 759 FLYNN ROAD TEL: (805) 383-8480  
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 12/14/10	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:		PREPARED BY: J. GELACIO	ITEM: POGO-PIN-5.70-9
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.70-9