


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/21/11	JAG

SKT3632

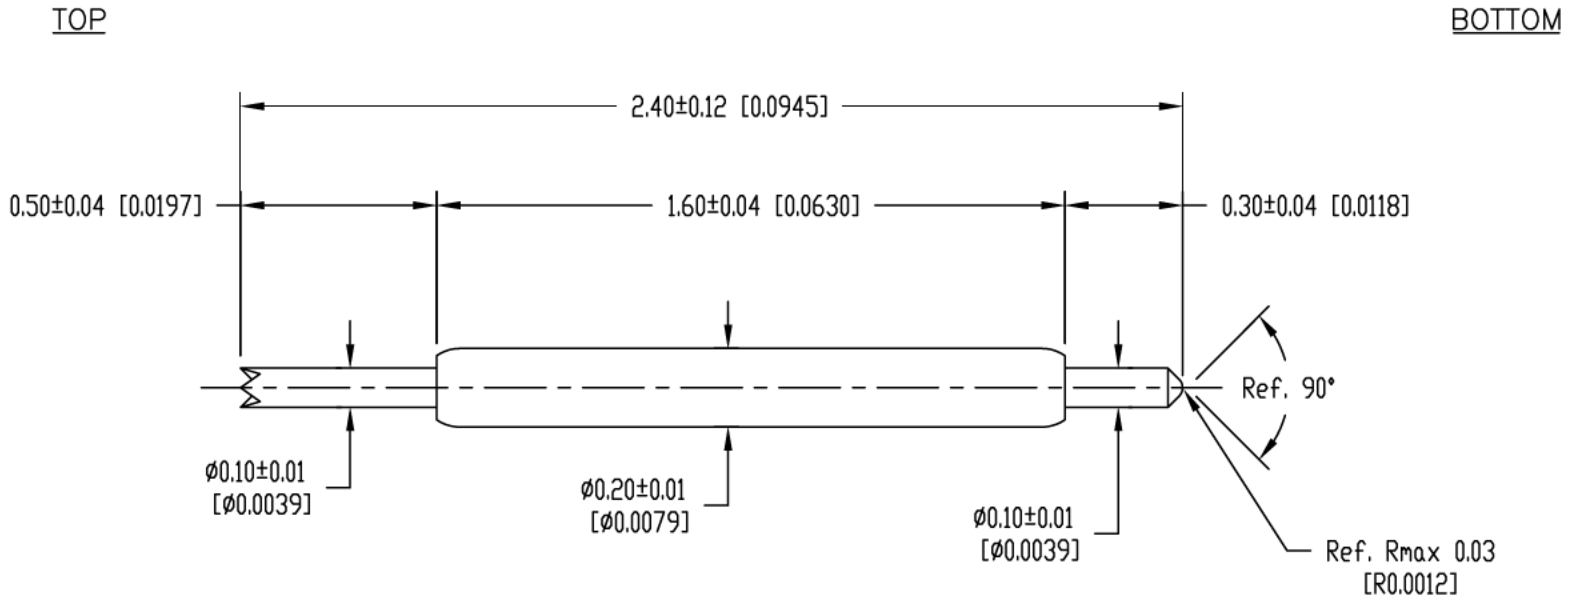

MINIMUM PITCH: 0.25mm

SPRING FORCE: 12.8g (0.451oz) @ 0.35mm (0.0138in)
 RECOMMENDED TRAVEL: 0.35mm (0.0138in)
 FULL TRAVEL: 0.45mm (0.0177in)

PART	MATERIAL	FINISH
PLUNGER (TOP)	HARDENED BeCu	GOLD PLATED
PLUNGER (BOTTOM)	HARDENED BeCu	GOLD PLATED
BARREL	Ni-Au ALLOY	GOLD PLATED
SPRING	MUSIC WIRE	GOLD PLATED

SCALE 2:1

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ARE:
 DECIMALS: .XX ±0.100MM .XX ±1.0°
 .XX ±0.050MM .XX ±0.5°
 .XXX ±0.025MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 04/21/11	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-2.40-1	DESCRIPTION: POGO-PIN-2.40-1
DO NOT SCALE DRAWING			