


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	08/09/11	TF

SKT3684

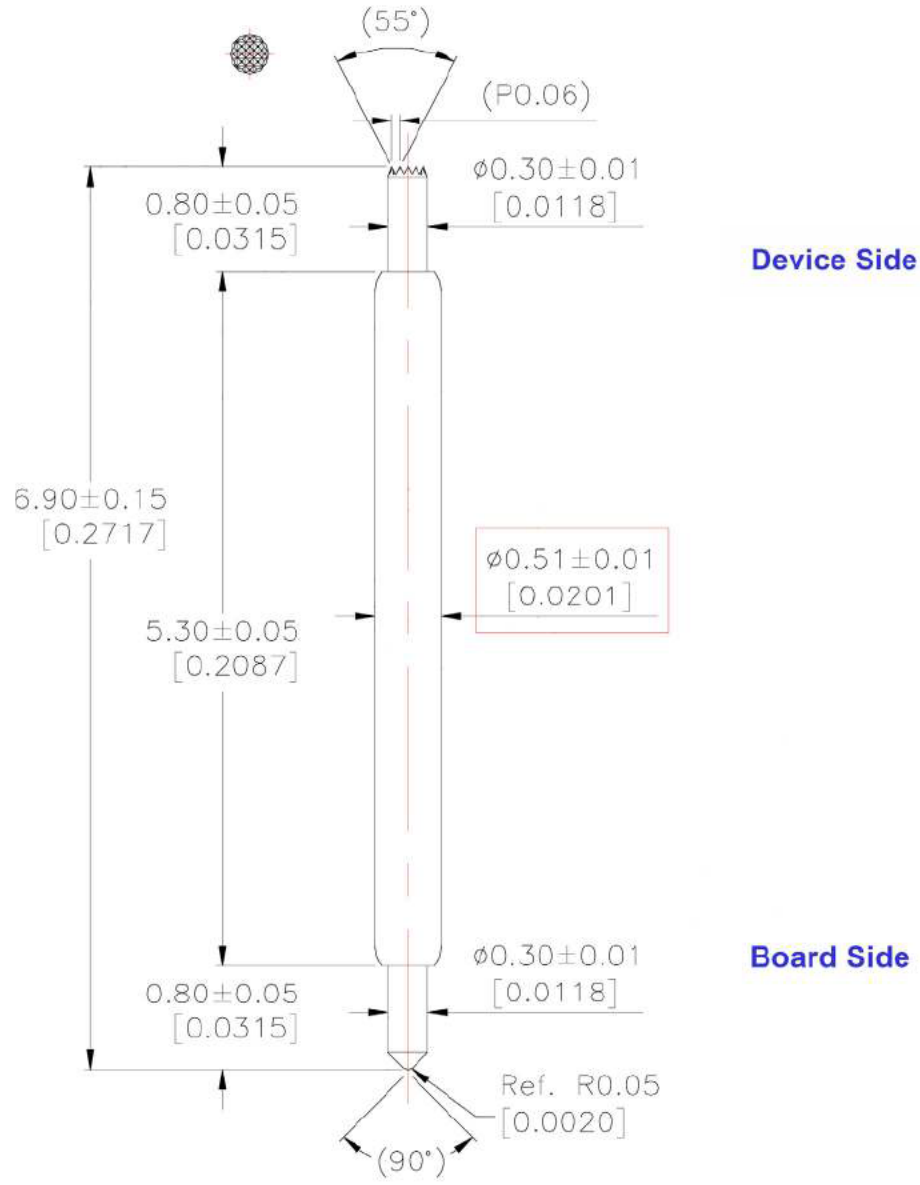

Pointing accuracy : ± 0.05 mm

Spring force [$\pm 20\%$]

- 13.2g(0.466oz) at initial travel
- 50.0g(1.764oz) at 1.10mm(0.0433) recommended travel
- 66.8g(2.356oz) at 1.60mm(0.0630) full travel

Material & Finish

Plunger (Top)	Hardened Beryllium copper	/ Gold Plated
Plunger (Bottom)	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH:
 GENERAL TOLERANCES: ± 0.10
 LINEAR:
 ANGULAR:

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 VLSI and SMT ADAPTERS and ACCESSORIES

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 08/09/11	REVISION: A	ASSEMBLY DRAWING
CHECKED:		PREPARED BY: T. FOOTE	ITEM: POGO-PIN-6.90-3
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-6.90-3