


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	09/13/12	JAG

SKT3819

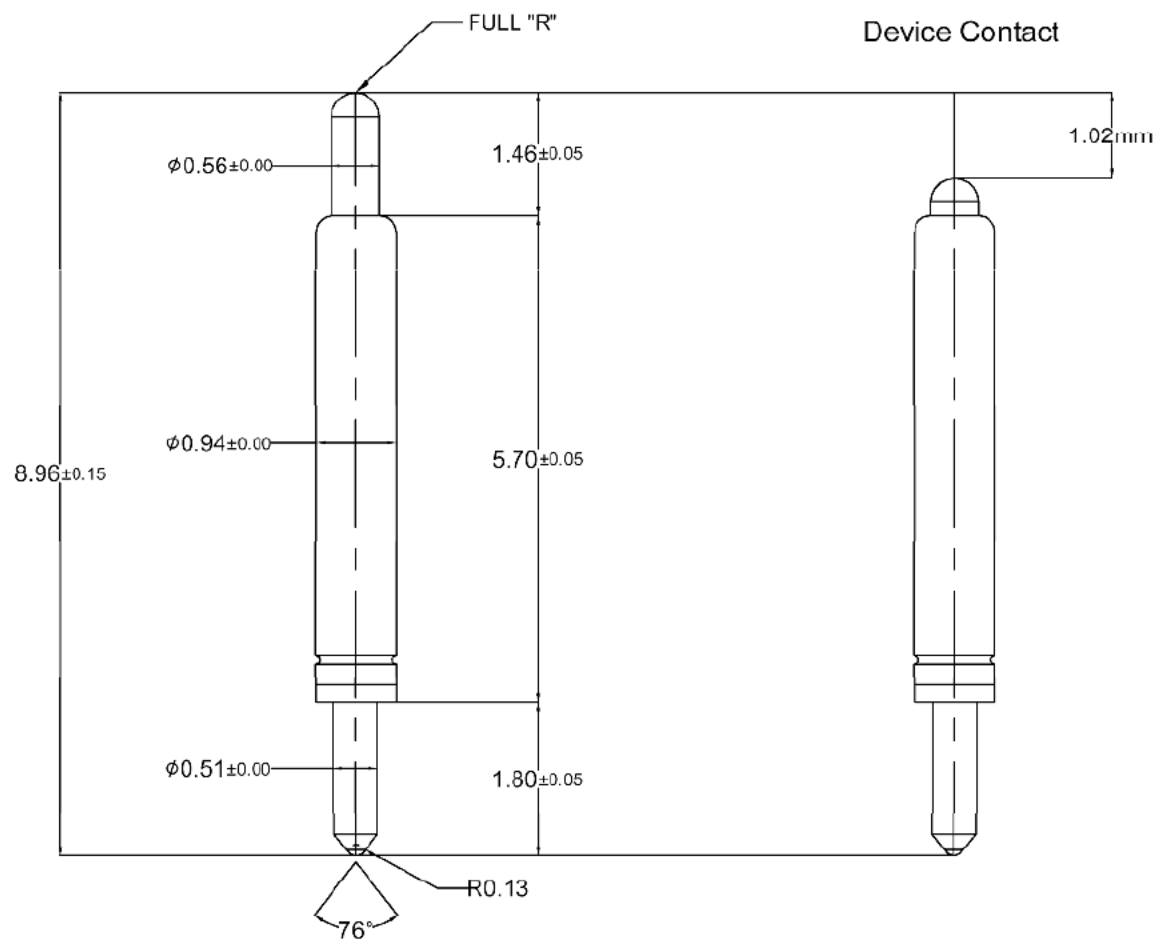

STATE	TRAVEL (mm)	SPRING FORCE (g)
Initial Travel	--	--
Recommended Travel	1.02	80.0
Full Travel	1.40	--

Spring Force: ± 20%

PART	MATERIAL	FINISH
Spring	Music Wire	Gold Plated
Barrel	Brass	Gold Plated
Top Plunger	Hardened Beryllium Copper	Gold Plated
Bottom Plunger	Hardened Beryllium Copper	Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



**EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —  
 759 FLYNN ROAD  
 CAMARILLO, CA 93012  
 TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1    DATE: 09/13/12    REVISION: A    **ASSEMBLY DRAWING**

CHECKED:    PREPARED BY: J. GELACIO    ITEM: POGO-PIN-8.96-1

DO NOT SCALE DRAWING    DESCRIPTION: POGO-PIN-8.96-1

DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:  
 X.X ±0.100MM    ANGULAR: X.X° ±1.0°  
 X.XX ±0.050MM    X.XX° ±0.5°  
 X.XXX ±0.025MM