


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/28/12	TF

SKT3861

[ Device side ]

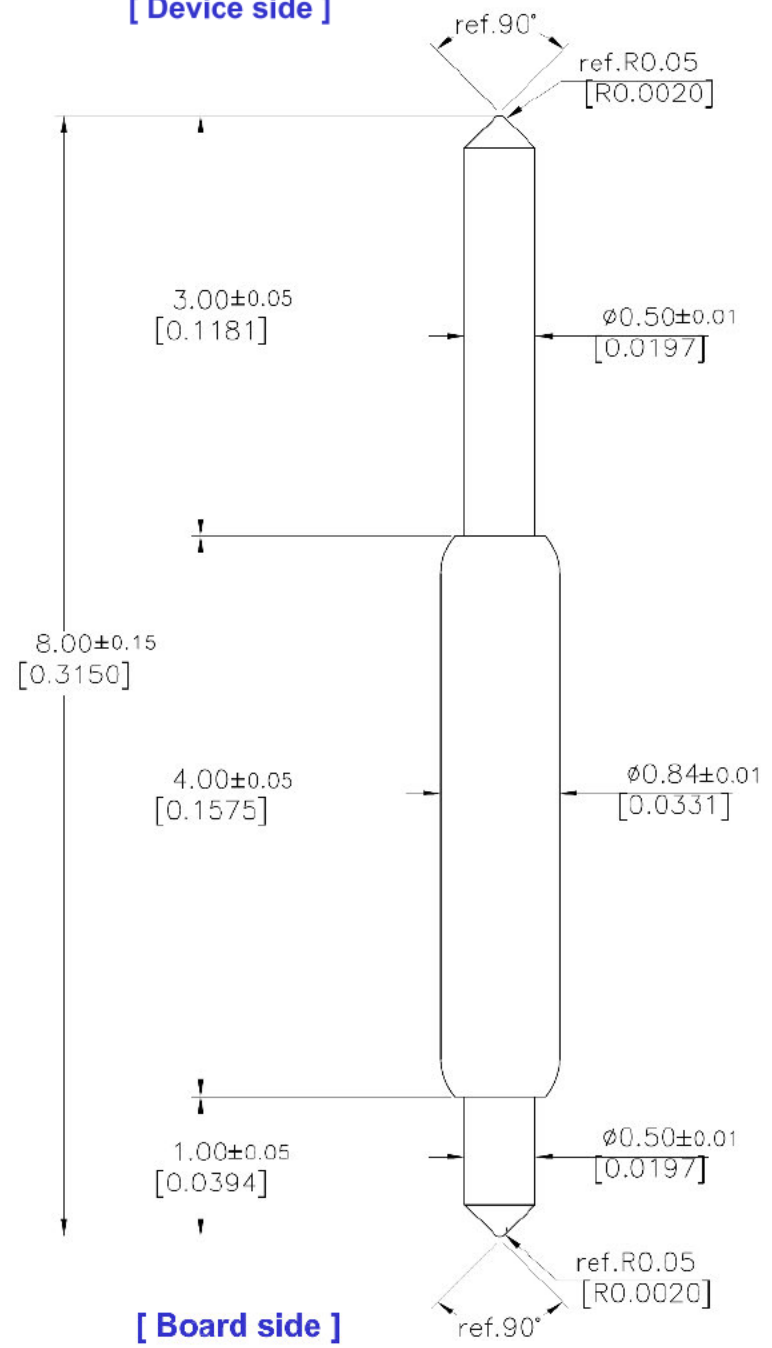

[ Board side ]

Pointing accuracy : ± 0.09 mm


Unit : Millimeter[inch]

Spring force [ ±20%]

- 15.5g(0.545oz) at initial travel
- 30.0g(1.058oz) at 0.80mm(0.0315) recommended travel
- 34.3g(1.211oz) at 1.05mm(0.0413) full travel

**Material & Finish**

Plunger [Device side]	Hardened Beryllium copper	/ Gold Plated
Plunger [Board side]	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
		<b>EMULATION TECHNOLOGY, INC.</b> VLSI and SMT ADAPTERS and ACCESSORIES	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 12/28/12	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: T. FOOTE	ITEM: POGO-PIN-8.00-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-8.00-1