


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	07/09/13	JAG

SKT3947

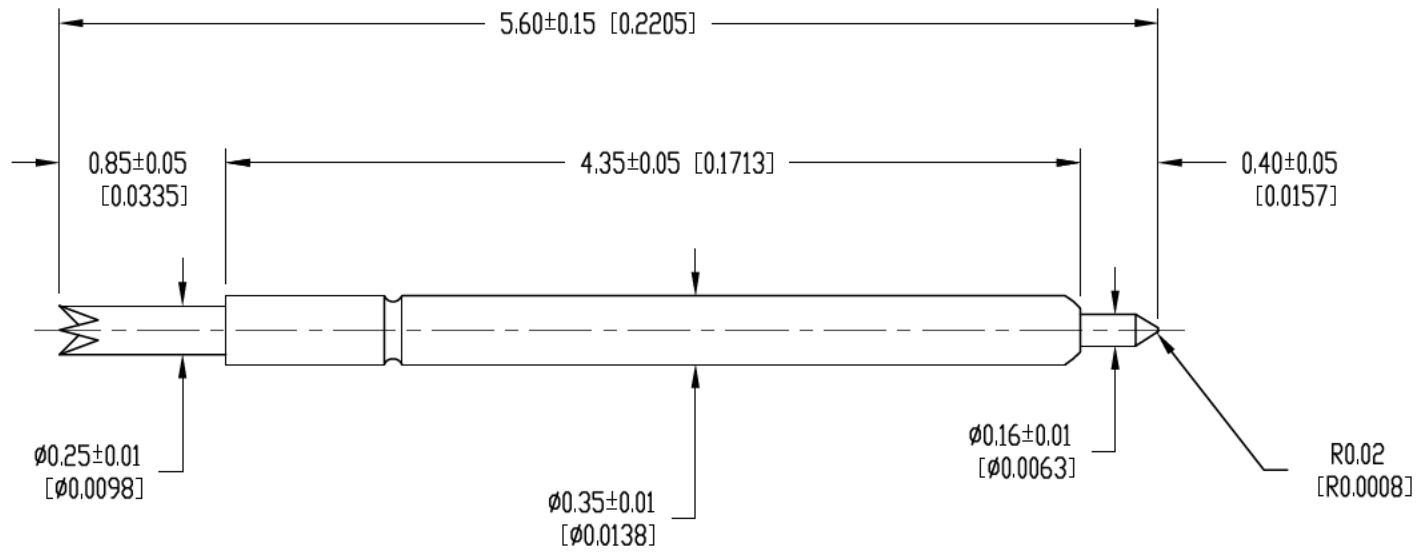

POINTING ACCURACY: ±0.03mm

SPRING FORCE  
 7.0g (0.247oz) at INITIAL TRAVEL  
 28.0g (0.988oz) at 0.64mm (0.0252) RECOMMENDED TRAVEL  
 33.0g (1.164oz) at 0.80mm (0.0315) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER	HARDENED STEEL	GOLD PLATED
BARREL	PHOSPHOR BRONZE	GOLD PLATED
SPRING	MUSIC WIRE	GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —  
 759 FLYNN ROAD TEL: (805) 383-8480  
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 07/09/13	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-5.60-1	DESCRIPTION: POGO-PIN-5.60-1
DO NOT SCALE DRAWING			

SCALE 1:1

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 TOLERANCES ARE:  
 DECIMALS: .XX ±0.100MM .XX ±1.0°  
 .XXX ±0.050MM .XX ±0.5°  
 X.XXX ±0.025MM