


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	09/09/13	JAG

SKT3980

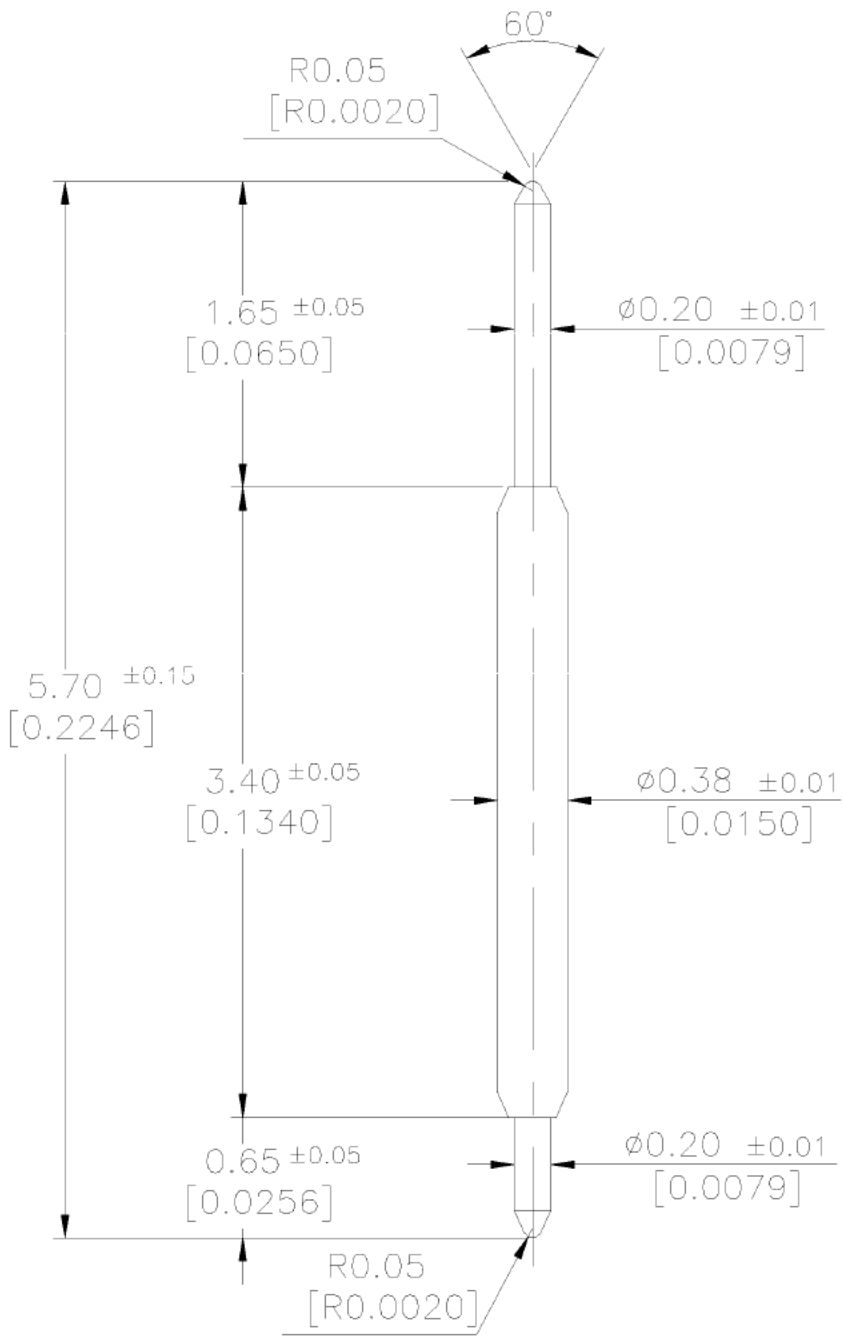

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	12.7 g (0.448 oz)
Recommended Travel	0.75 mm (0.0295)	30.0 g (1.058 oz)
Full Travel	0.80 mm (0.0315)	31.0 g (1.093 oz)

Spring Force: ± 20%

Pointing Accuracy: ± 0.085 mm

PART	MATERIAL	FINISH
Plunger	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Music Wire	Gold Plated

DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE:
 XX ±0.100MM ANGULAR: XX° ±1.0°
 X.XX ±0.050MM X.XX° ±0.5°
 X.XXX ±0.025MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	EMULATION TECHNOLOGY, INC.	
	VLSI and SMT ADAPTERS and ACCESSORIES	
759 FLYNN ROAD		TEL: (805) 383-8480
CAMARILLO, CA 93012		FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 09/09/13	REVISION: A
CHECKED:		ASSEMBLY DRAWING
PREPARED BY: J. GELACIO		ITEM: POGO-PIN-5.70-E
DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-5.70-E