


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	10/07/13	JAG

SKT3984

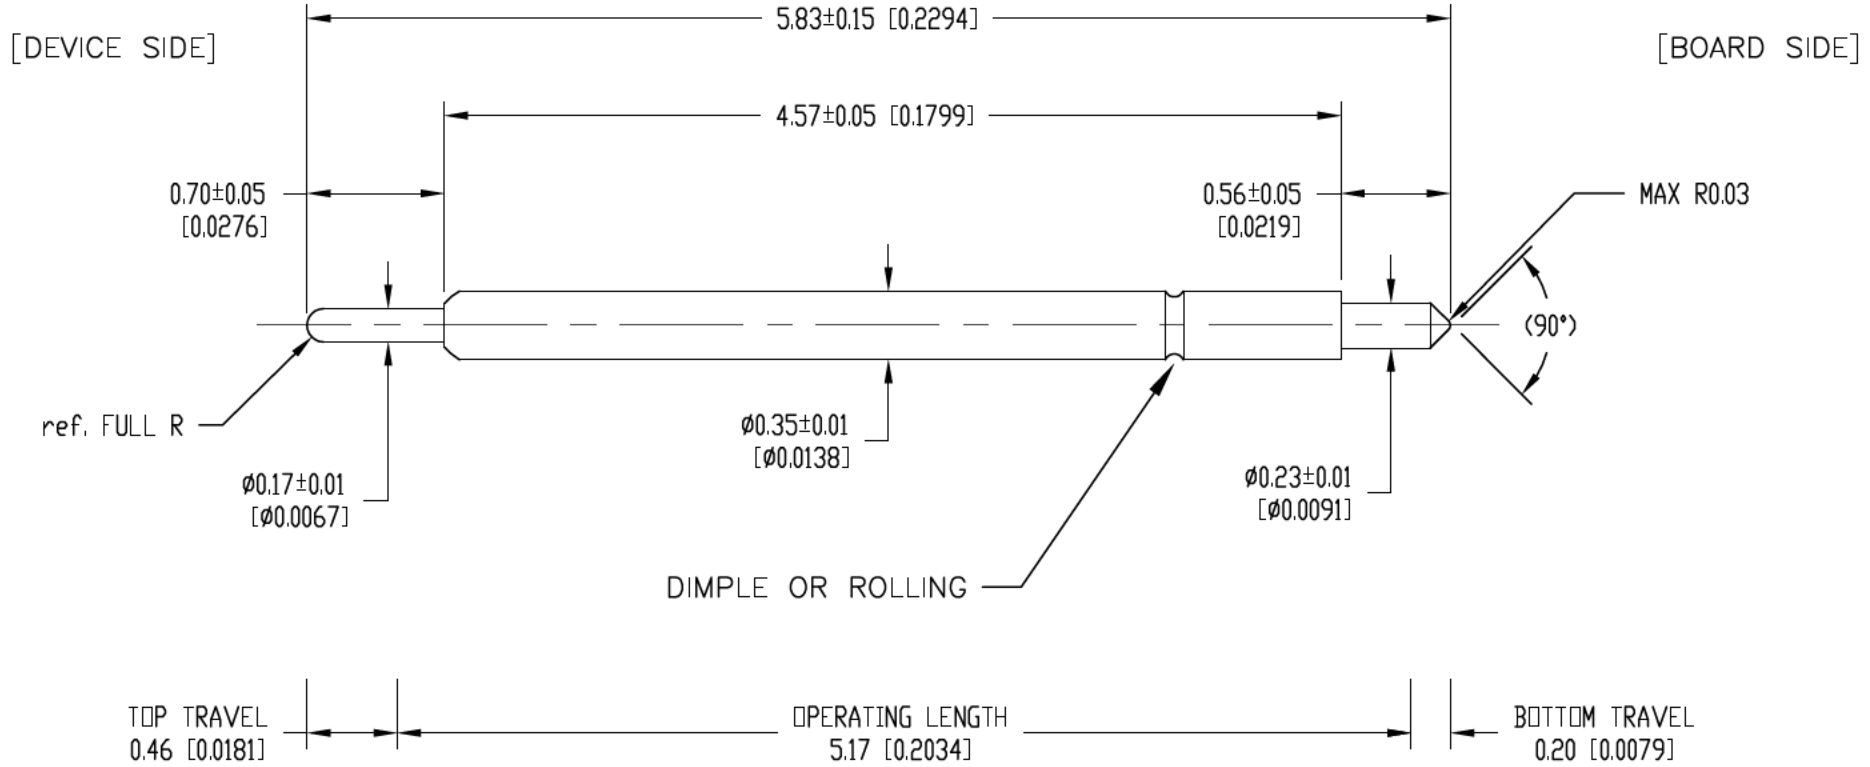

POINTING ACCURACY: ± 0.06 mm

SPRING FORCE [$\pm 20\%$]
 5.0g (0.178oz) at INITIAL TRAVEL
 27.5g (0.970oz) at 0.66mm (0.0260) RECOMMENDED TRAVEL
 38.6g (1.362oz) at 1.00mm (0.0394) FULL TRAVEL

NOTE: 0.20mm or more of Preload at the bottom side MUST be in use for durability of the pin when the pin is set in the DUT Board.

PART	MATERIAL	FINISH
PLUNGER (DEVICE SIDE)	HARDENED BERYLLIUM COPPER	GOLD PLATED
PLUNGER (BOARD SIDE)	HARDENED BERYLLIUM COPPER	GOLD PLATED
BARREL	PHOSPHOR BRONZE	GOLD PLATED
SPRING	STAINLESS STEEL	GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 09/26/13	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-5.83-1	DESCRIPTION: POGO-PIN-5.83-1
DO NOT SCALE DRAWING			