


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/19/15	JAG

SKT4021

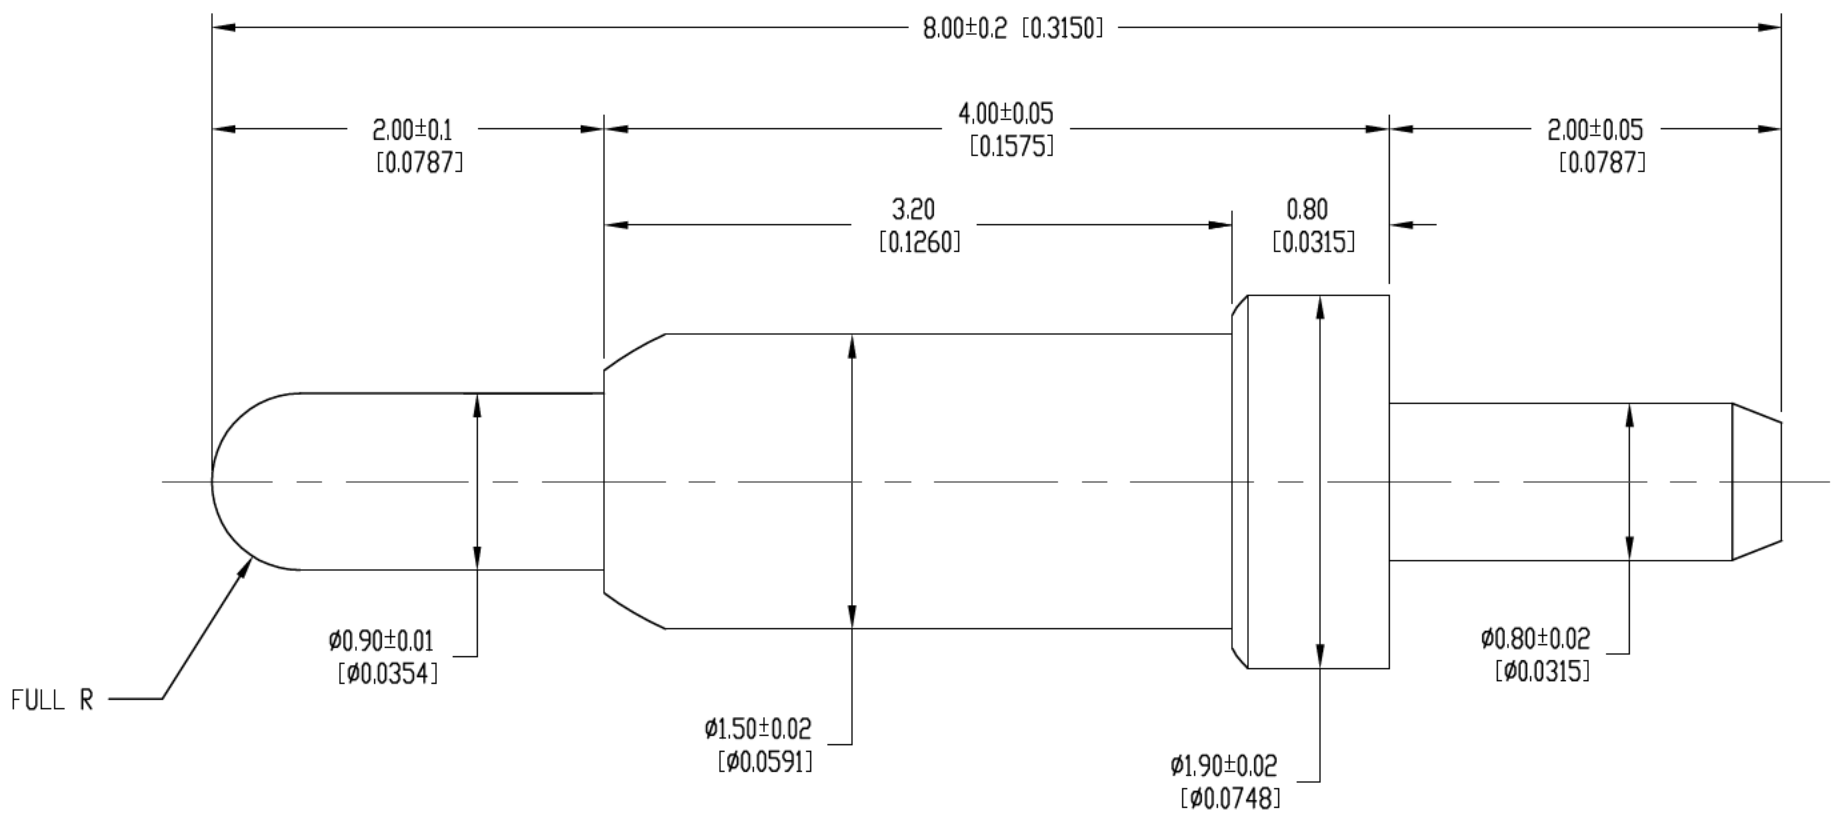

POINTING ACCURACY: ±0.08mm

SPRING FORCE [±20%]

- 4.6g (0.162oz) at INITIAL TRAVEL
- 21.1g (0.744oz) at 1.00mm (0.0394) RECOMMENDED TRAVEL
- 29.6g (1.044oz) at 1.52mm (0.0598) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER	BRASS	GOLD PLATED
BARREL	BRASS	GOLD PLATED
SPRING	MUSIC WIRE	GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/19/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-8.00-4	DESCRIPTION: POGO-PIN-8.00-4
DO NOT SCALE DRAWING			