


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/03/15	JAG

SKT4145

DEVICE SIDE

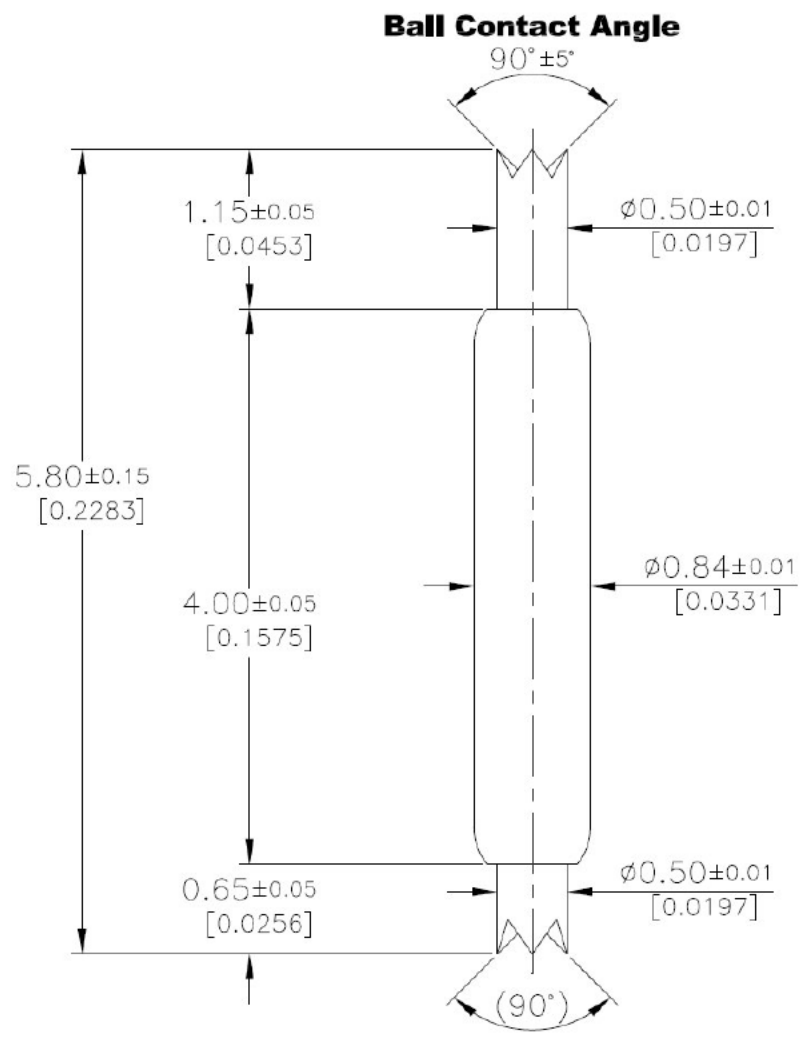

BOARD SIDE

Pointing Accuracy: ± 0.05mm

Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	4.7g (0.164oz)
Recommended Travel	1.00mm (0.0394)	20.4g (0.721oz)
Full Travel	1.30mm (0.0512)	25.2g (0.888oz)

PART	MATERIAL	FINISH
Plunger (Device side)	Hardened Beryllium Copper	Gold Plated
Plunger (Board side)	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Stainless Steel	Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 VLSI and SMT ADAPTERS and ACCESSORIES  
 759 FLYNN ROAD  
 CAMARILLO, CA 93012  
 TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 04/03/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: J. GELACIO	ITEM: POGO-PIN-5.80-6	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.80-6