


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	5/11/15	TF

SKT4157

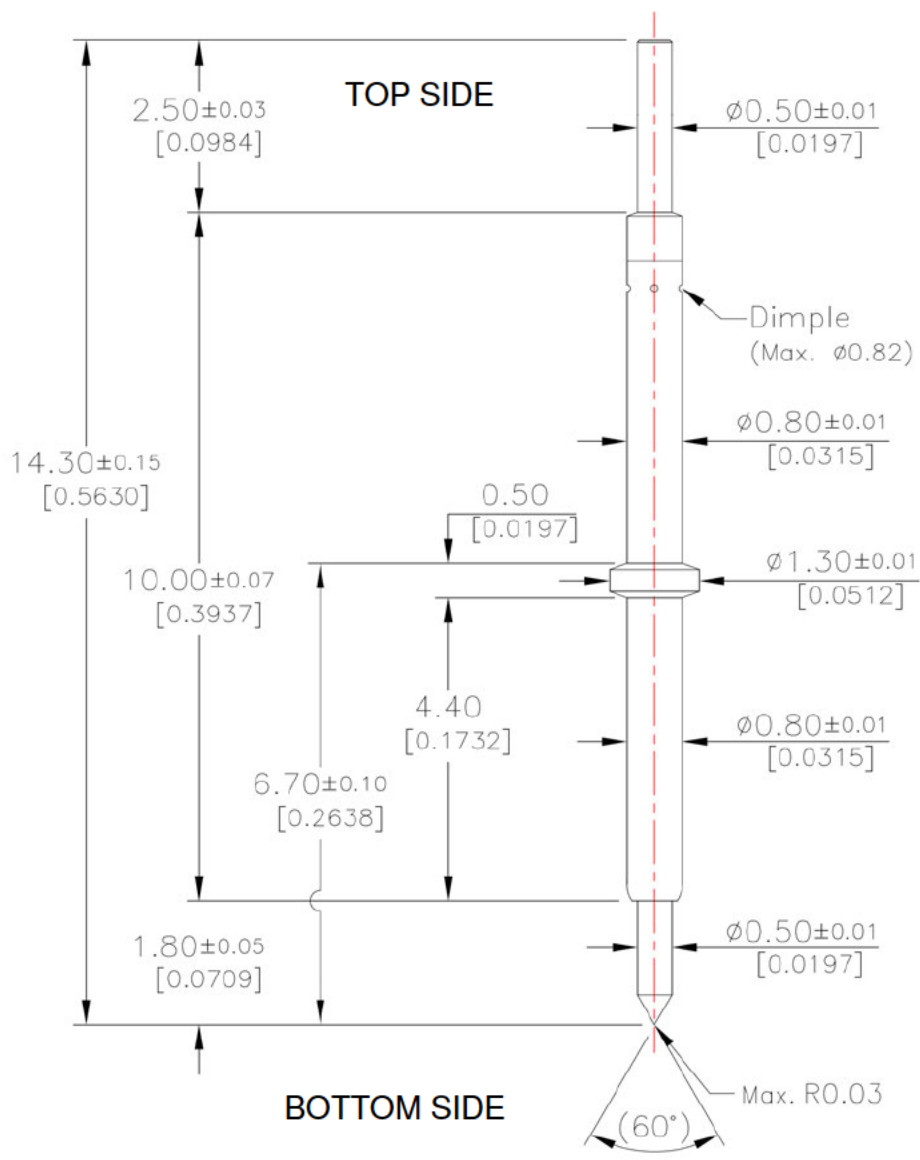

Pointing Accuracy: ± 0.05 mm

Spring Force [+2g/-1g]
 2.0g (0.069oz) at initial travel
 3.0g (0.105oz) at 0.50mm (0.0197") recommended travel
 4.0g (0.141oz) at 1.00mm (0.0394") full travel

Material & Finish

Terminal (Top side)	Hardened Beryllium Copper	/ Gold Plated
Plunger (Bottom side)	Brass	/ Gold Plated
Barrel	Brass	/ Gold Plated
Spring	Stainless Steel	/ Gold Plated

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH:
 GENERAL TOLERANCES: ± 0.10
 LINEAR:
 ANGULAR:

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

ET **EMULATION TECHNOLOGY, INC.**
 VLSI and SMT ADAPTERS and ACCESSORIES
 759 FLYNN ROAD TEL: (805) 383-8480
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 5/11/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: T. FOOTE	ITEM: POGO-PIN-14.3-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-14.3-1