


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/05/15	JAG

SKT4166

[DEVICE SIDE]

[BOARD SIDE]

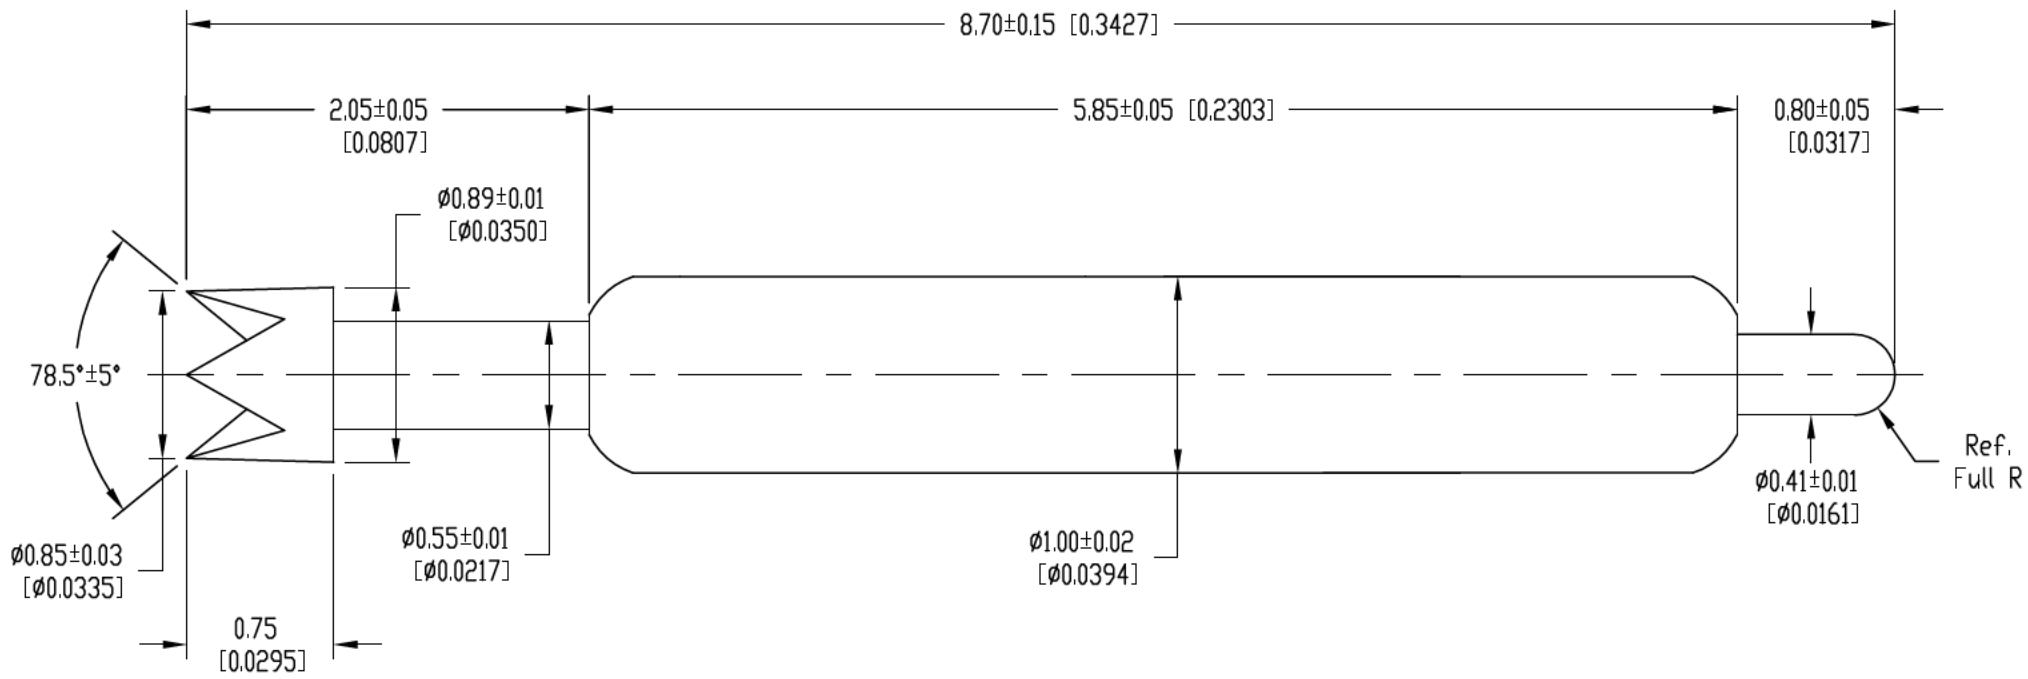

POINTING ACCURACY: ±0.05mm

SPRING FORCE [±20%]
 9.0g (0.317oz) at INITIAL TRAVEL
 29.3g (1.034oz) at 1.40mm (0.0551") RECOMMENDED TRAVEL
 39.4g (1.390oz) at 2.10mm (0.0827") FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER (DEVICE SIDE)	HARDENED STEEL	/GOLD PLATED
PLUNGER (BOARD SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	MUSIC WIRE	/GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

ET **EMULATION TECHNOLOGY, INC.**
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD TEL: (805) 383-8480
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 06/05/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-8.70-3	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-8.70-3