


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/25/15	JAG

SKT4173

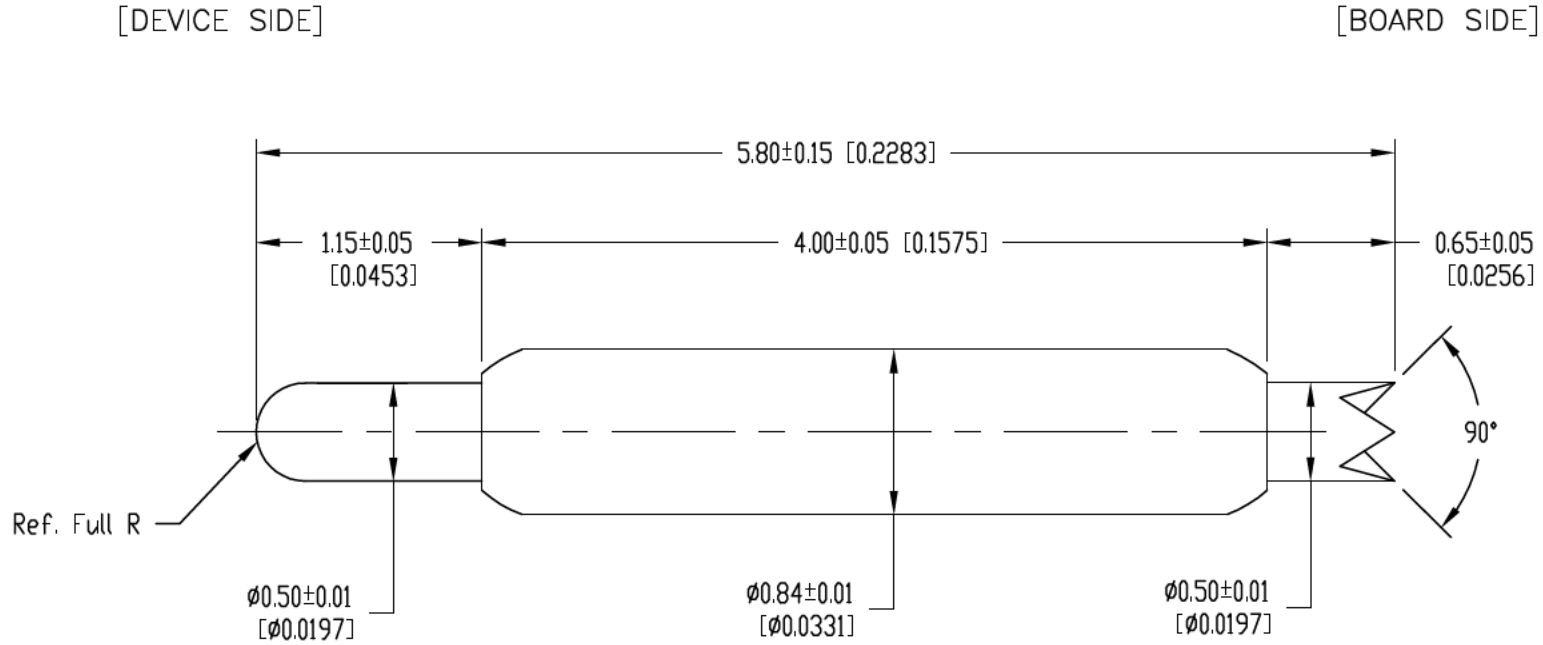

POINTING ACCURACY: ±0.05mm

SPRING FORCE [±20%]  
 13.5g (0.476oz) at INITIAL TRAVEL  
 31.0g (1.093oz) at 0.70mm (0.0276") RECOMMENDED TRAVEL  
 45.8g (1.616oz) at 1.30mm (0.0512") FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER (DEVICE SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
PLUNGER (BOARD SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	STAINLESS STEEL	/GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**ET** **EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD TEL: (805) 383-8480  
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 06/25/15	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-5.80-8	DESCRIPTION: POGO-PIN-5.80-8
DO NOT SCALE DRAWING			