


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	08/21/15	M.F.

SKT4188

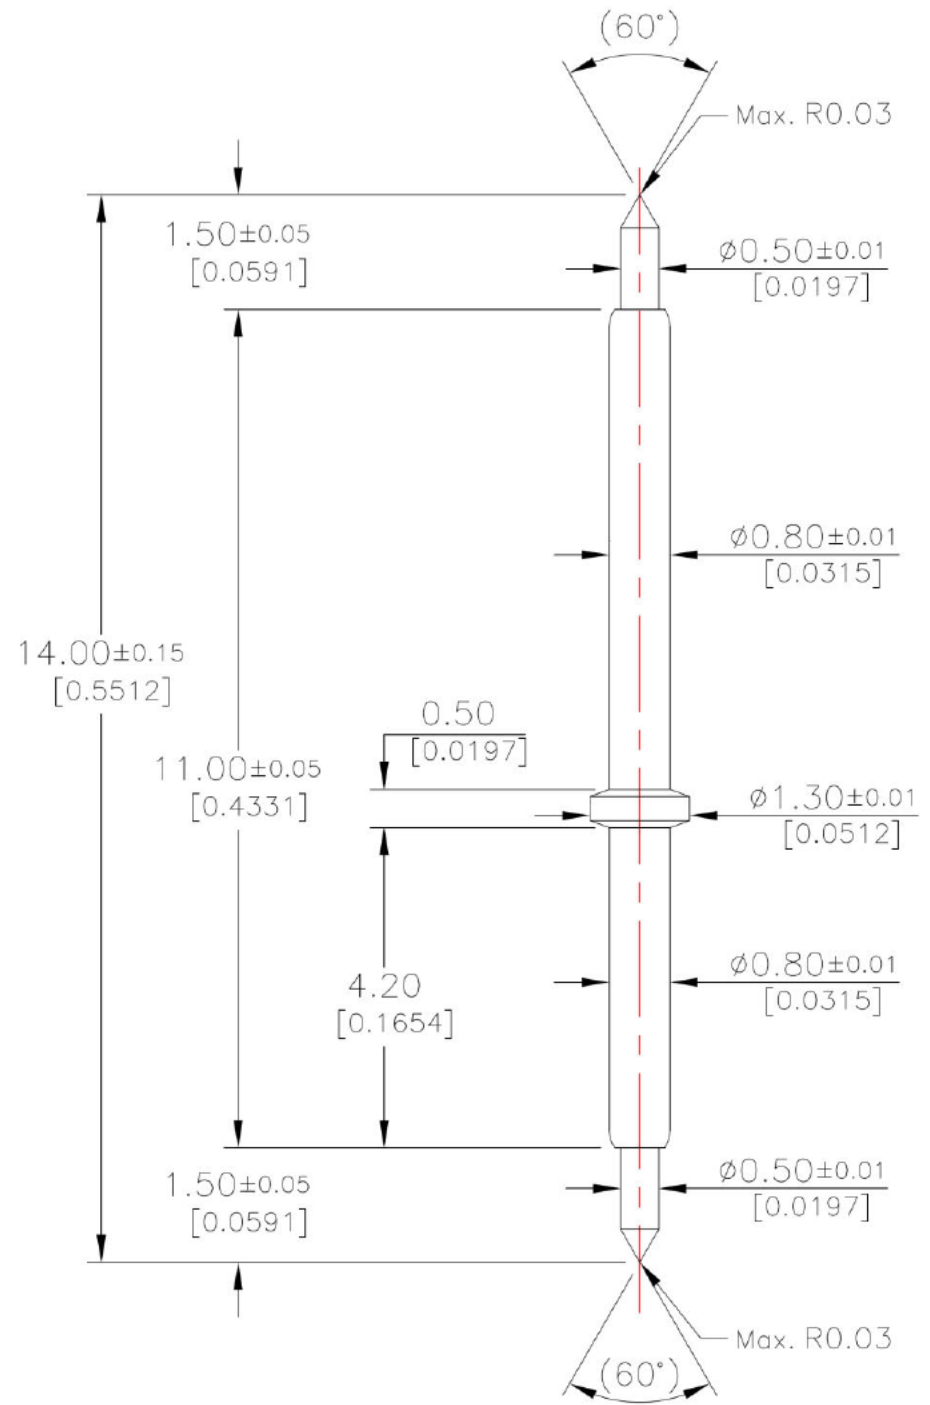

[TOP SIDE]

[BOTTOM SIDE]


Pointing Accuracy: ± 0.04 mm
 Spring Force [+2/-1g]
 2.9g (0.102oz) at initial travel
 4.0g (0.141oz) at 0.50mm (0.0197") recommended travel
 6.2g (0.217oz) at 1.50mm (0.0591") full travel

Material & Finish

Plunger [Top side]	Hardened Beryllium copper	/ Gold Plated
Plunger [Bottom side]	Hardened Beryllium copper	/ Gold Plated
Barrel	Brass	/ Gold Plated
Spring	Stainless Steel	/ Gold Plated

Unit: Millimeter [inch]

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

 EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES			
759 FLYNN ROAD		TEL: (805) 383-8480	
CAMARILLO, CA 93012		FAX: (805) 383-8484	
SHEET: 1 OF 1	DATE: 08/21/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: M. FAJARDO	ITEM: POGO-PIN-14.0-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-14.0-1