


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/17/15	TF

SKT4221

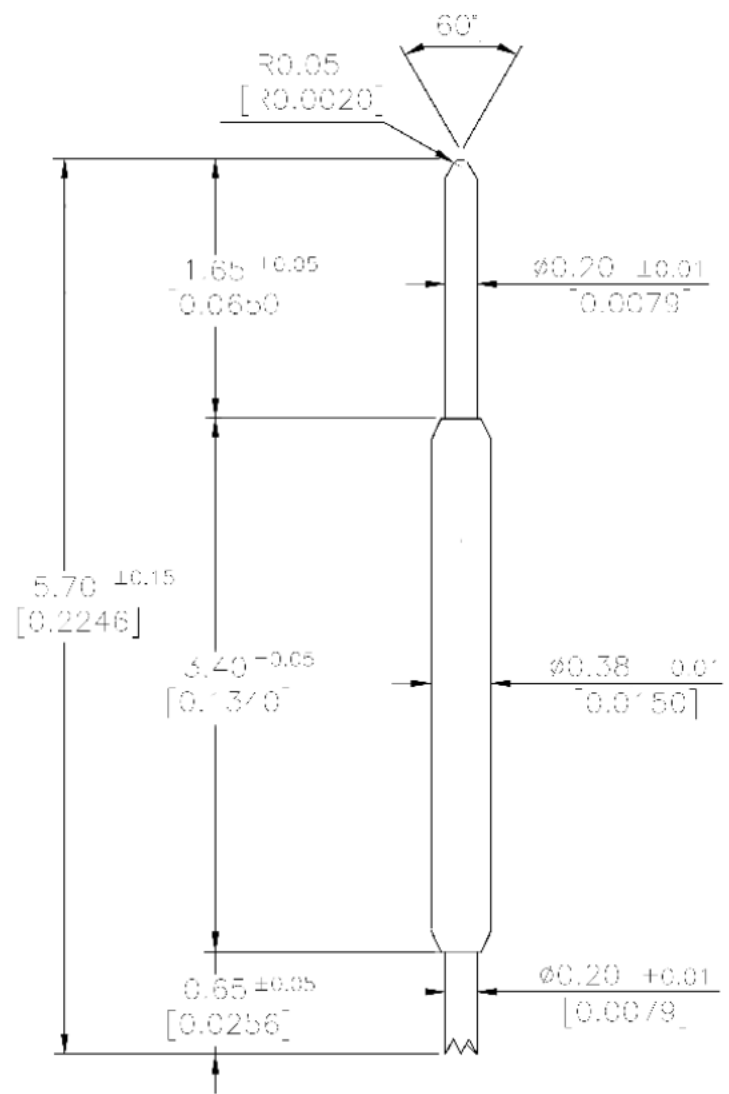

Unit : Millimeter[inch]

Pointing accuracy : ± 0.085 mm


Spring force [ ±20%]

- 12.7g(0.448oz) at initial travel
- 30.0g(1.058oz) at 0.75mm(0.0295) recommended travel
- 31.0g(1.093oz) at 0.80mm(0.0315) full travel

Material & Finish

Plunger	Hardened Beryllium copper	/	Gold Plated
Barrel	Phosphor Bronze	/	Gold Plated
Spring	Music wire	/	Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

		<b>EMULATION TECHNOLOGY, INC.</b>	
		VLSI and SMT ADAPTERS and ACCESSORIES	
759 FLYNN ROAD CAMARILLO, CA 93012		TEL: (805) 383-8480 FAX: (805) 383-8484	
SHEET: 1 OF 1	DATE: 12/17/15	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:		PREPARED BY: T. FOOTE	ITEM: POGO-PIN-5.70-F
<b>DO NOT SCALE DRAWING</b>			DESCRIPTION: POGO-PIN-5.70-F