


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	1/15/16	NEN

SKT4230

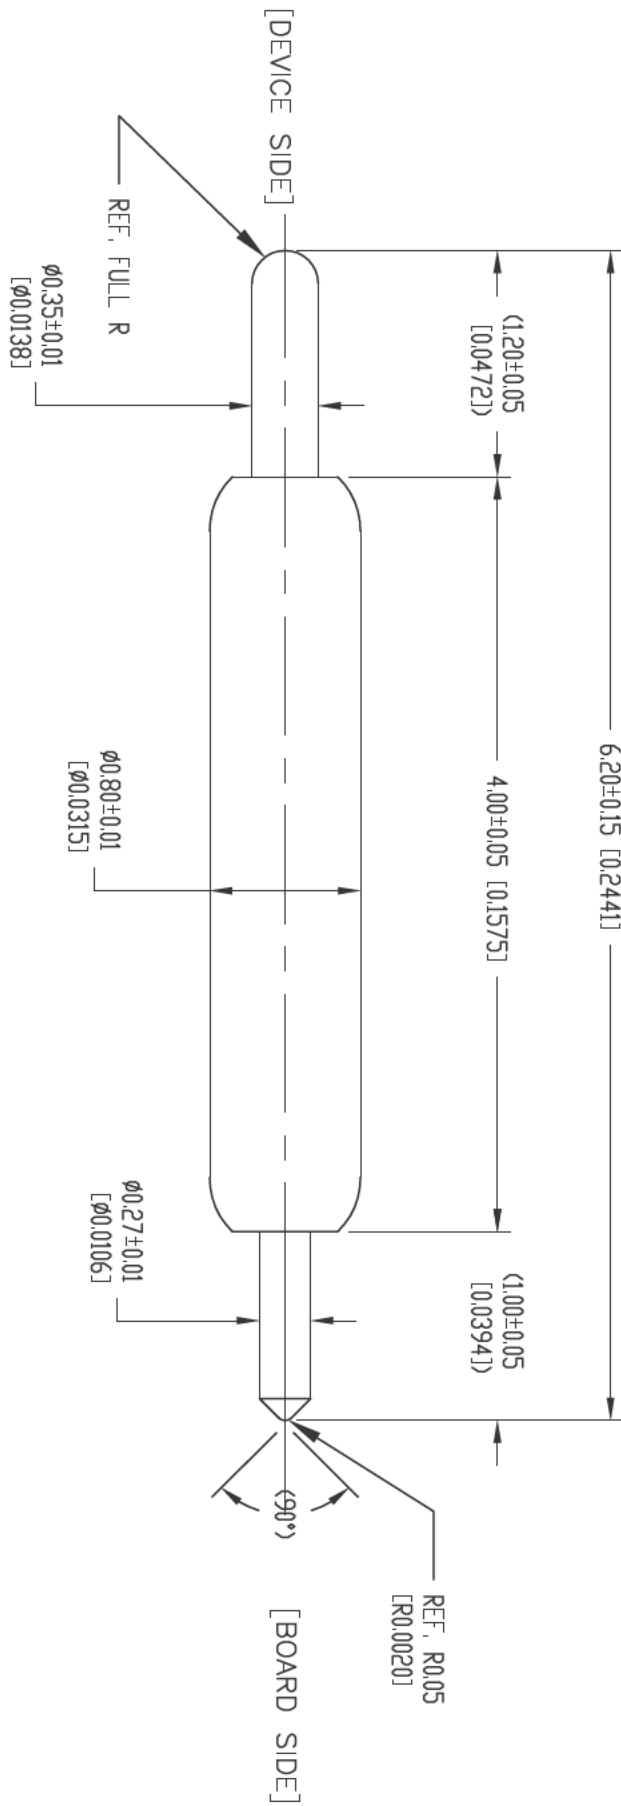

NOTE: 1.50MM PITCH.


Unit: Millimeter [inch]

POINTING ACCURACY: ±0.06mm

To reduce the risk of SHORTING or abnormal mechanical operation, this Pointing Accuracy needs to be highly considered during housing design.

SPRING FORCE [±20%]  
 3.8g (0.134oz) at INITIAL TRAVEL  
 19.0g (0.670oz) at 0.80mm (0.0315") RECOMMENDED TRAVEL  
 23.7g (0.937oz) at 1.05mm (0.0413") FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER [DEVICE SIDE] PLUNGER [BOARD SIDE] BARREL SPRING	HARDENED BERYLLIUM COPPER HARDENED BERYLLIUM COPPER PHOSPHOR BRONZE MUSIC WIRE	/GOLD PLATED /GOLD PLATED /GOLD PLATED /GOLD PLATED

		<b>EMULATION TECHNOLOGY, INC.</b> VLSI and SMT ADAPTERS and ACCESSORIES	
		741 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1 CHECKED:	DATE: 1/15/16 DRAWN: N. NASHED	REVISION: A	ITEM: ASSEMBLY DRAWING DESCRIPTION: POGO-PIN-6.20-1

DO NOT SCALE DRAWING