


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/09/16	MN

SKT4241

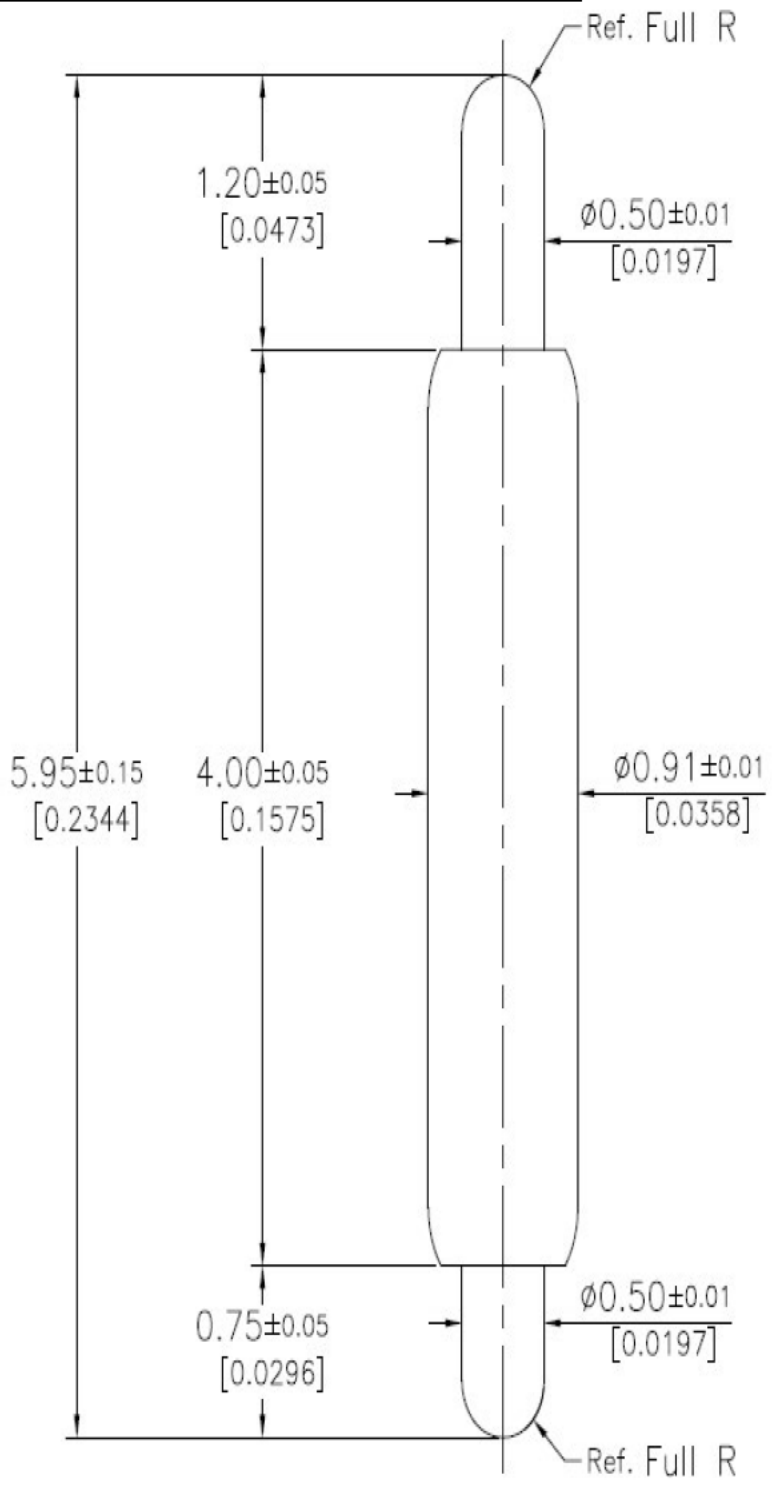

[Device side]

Pointing Accuracy: ± 0.045 mm
 Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	15.5g (0.547oz)
Recommended Travel	0.75mm (0.0295")	28.7g (1.012oz)
Full Travel	0.95mm (0.0374")	32.2g (1.136oz)

PART	MATERIAL	FINISH
Spring	Special SUS Spring 2	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Plunger [Device Side]	Hardened Beryllium Copper	Gold Plated
Plunger [Board side]	Hardened Beryllium Copper	Gold Plated

[Board side]

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

ET **EMULATION TECHNOLOGY, INC.**
 VLSI and SMT ADAPTERS and ACCESSORIES

741 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/09/16	REVISION: A	ASSEMBLY DRAWING
CHECKED: Janice Gelacio	PREPARED BY: Marco Nunes	ITEM: POGO-PIN-5.95-5	DESCRIPTION: POGO-PIN-5.95-5

DO NOT SCALE DRAWING