


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	05/27/16	RF

SKT4268

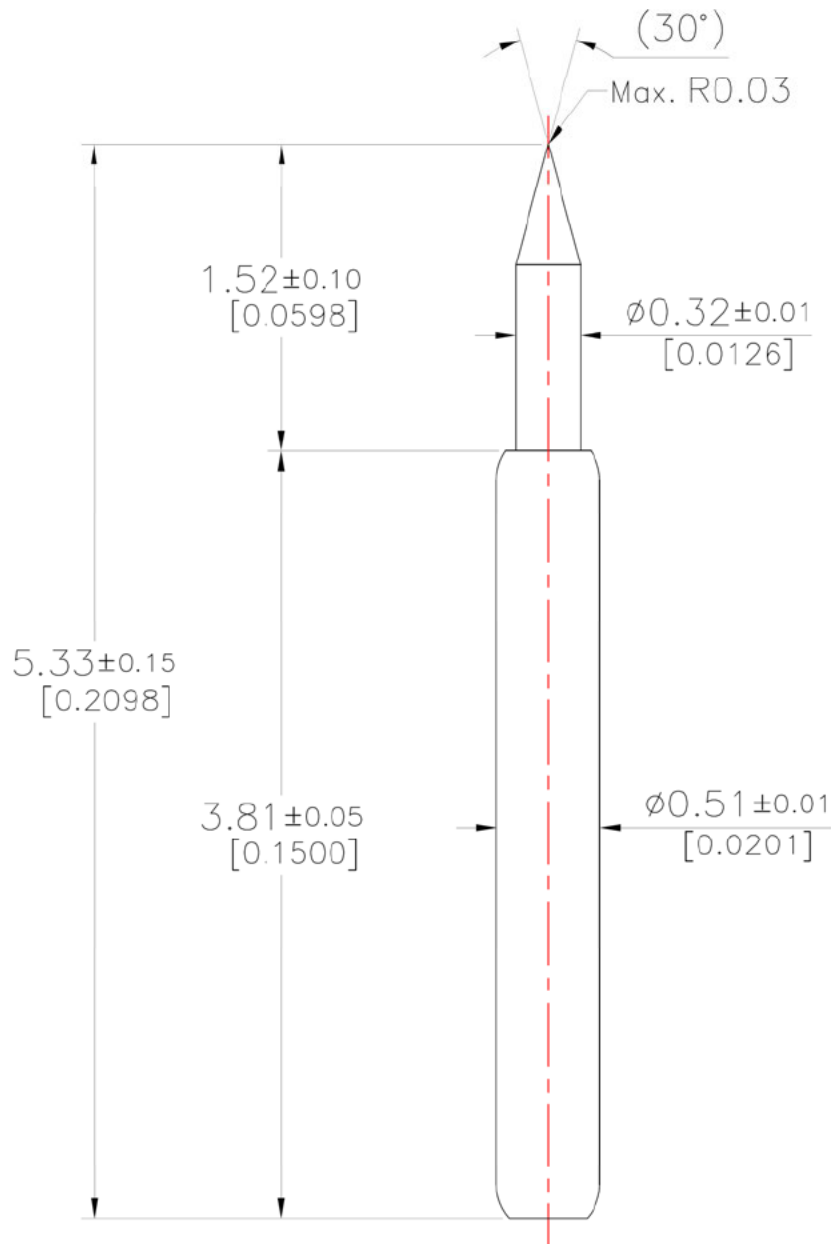

Pointing Accuracy:  $\pm 0.05$  mm

Spring Force:  $\pm 20\%$

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	4.6g (0.161oz)
Recommended Travel	1.01mm (0.040")	37.0g (1.305oz)
Full Travel	1.27mm (0.050")	45.4g (1.600oz)

PART	MATERIAL	FINISH
Spring	Music Wire	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Top Plunger	Hardened Steel	Palladium Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

<b>ET</b>	<b>EMULATION TECHNOLOGY, INC.</b>	
	VLSI and SMT ADAPTERS and ACCESSORIES	
741 FLYNN ROAD		TEL: (805) 383-8480
CAMARILLO, CA 93012		FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 05/27/16	REVISION: A
ASSEMBLY DRAWING		ITEM: POGO-PIN-5.33-1
CHECKED: PREPARED BY: R. Flores		DESCRIPTION: POGO-PIN-5.33-1
DO NOT SCALE DRAWING		