


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/23/16	MN

SKT4275

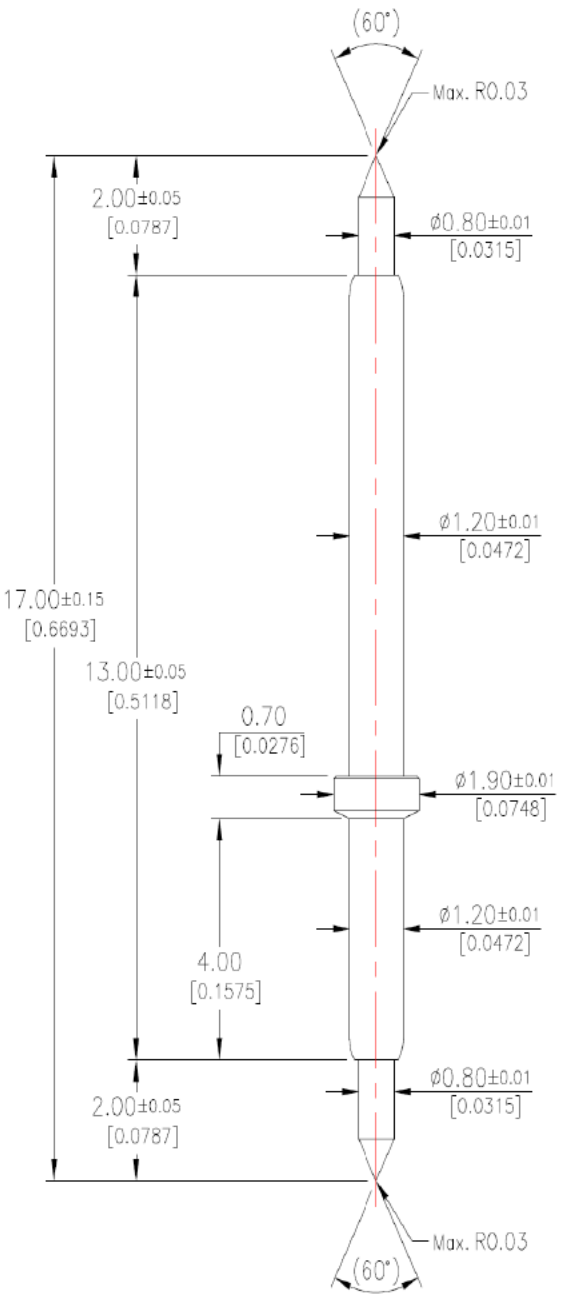

[ Top side ]

[ Bottom side ]

Pointing Accuracy: ± 0.05 mm

Spring Force: [ +2g / -1g ]

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	2.4g(0.085oz)
Recommended Travel	1.00mm(0.0394")	4.0g(0.141oz)
Full Travel	1.80mm(0.0709")	5.3g(0.187oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Brass	Gold Plated
Top Plunger	Hardened Beryllium Copper	Gold Plated
Bottom Plunger	Hardened Beryllium Copper	Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	<b>EMULATION TECHNOLOGY, INC.</b>	
	VLSI and SMT ADAPTERS and ACCESSORIES	
741 FLYNN ROAD CAMARILLO, CA 93012		TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 06/23/16	REVISION: A
ASSEMBLY DRAWING		ITEM: POGO-PIN-17.0-1
CHECKED:		PREPARED BY: Marco Nunes
DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-17.0-1