


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	09/28/16	MN

SKT4300

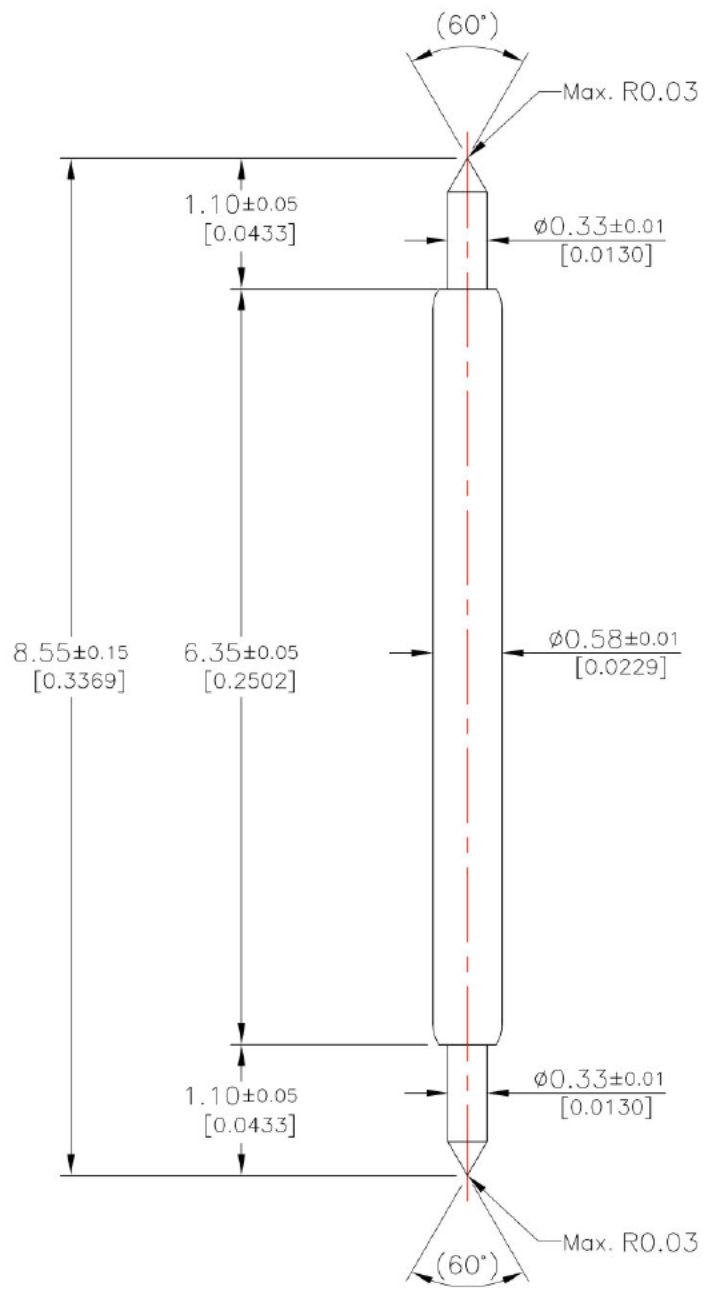

[ Device Side ]

Pointing Accuracy: ± 0.05 mm

Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	2.8g(0.100oz)
Recommended Travel	1.00mm(0.0394")	23.5g(0.828oz)
Full Travel	1.50mm(0.0591")	31.2g(1.100oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Plunger [Device side]	Hardened Beryllium Copper	Gold Plated
Plunger [Board Side]	Hardened Beryllium Copper	Gold Plated

[ Board Side ]

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD  
 CAMARILLO, CA 93012

TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 09/28/16	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: Marco Nunes	ITEM: POGO-PIN-8.55-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-8.55-1