


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/01/05	H.N.
B	UPDATED DRAWING	01/26/12	JAG

SKT2317

PLUNGER A

PLUNGER B

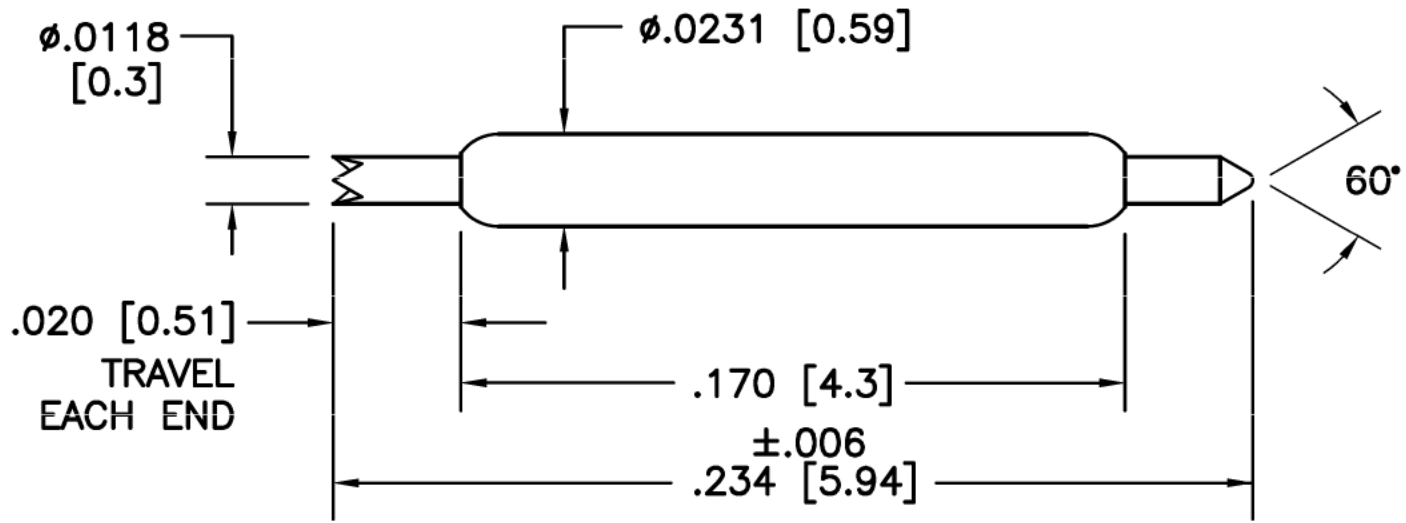

NOTES

- 1 DIMENSIONS ARE IN INCHES [MM REF]
- 2 FORCE - 14 GRAMS [0.5 oz] INITIAL  
32 GRAMS [1.1 OZ] AT .024 [0.61] DEFLECTION
- 3 RESISTANCE-LESS THAN 50 MILLIOHMS
- 4 MAX. CURRENT-3 AMPERES
- 5 OPERATING TEMPERATURES-  
-40°C (-40°F) TO 120°C (250°F)

CONTACT

- PLUNGER A - HARDENED BeCu  
FINISH - GOLD-PLATED
- PLUNGER B - HARDENED BeCu  
FINISH - GOLD-PLATED
- BARREL - COPPER ALLOY  
FINISH - GOLD-PLATED
- SPRING - BeCu  
FINISH - GOLD-PLATED

ALL DIMENSIONS ARE IN INCHES [MM] UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 VLSI and SMT ADAPTERS and ACCESSORIES

759 FLYNN ROAD  
 CAMARILLO, CA 93012

TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 01/26/12	REVISION: B	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: J. GELACIO	ITEM: POGO-PIN-5.94-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.94-1